

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Constant voltage source with pluggable connection technology for the generation of a highly precise constant voltage of 15 V and for the supply of sensors without internal power supply. Push-in connection technology.

Commercial data

Item number	1033201
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DK112Z
GTIN	4055626537696
Weight per piece (including packing)	106.4 g
Weight per piece (excluding packing)	85 g
Customs tariff number	85437090
Country of origin	DE

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Constant voltage source
Product family	MINI Analog Pro

Insulation characteristics: GB Standard

Overvoltage category	II
Pollution degree	2

Electrical properties

Electrical isolation between input and output	yes
Maximum temperature coefficient	< 0.01 %/K
Maximum transmission error	≤ 0.4 % (of final value)

Electrical isolation Input/output/power supply

Rated insulation voltage	300 V _{rms}
Test voltage	3 kV AC (50 Hz, 60 s)
Insulation	Reinforced insulation according to IEC/EN 61010-1

Supply

Supply voltage range	9.6 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Typical current consumption	< 38.2 mA (24 V) < 79.8 mA (12 V)
Power consumption	< 900 mW (9.6 V DC)

Input data

Signal: Voltage

Voltage input signal	9.6 V DC ... 30 V DC
Transmitter supply voltage	15 V

Output data

Signal: Voltage

Max. voltage output signal	15 V DC
Short-circuit current	> 35 mA
Output voltage with wire break	15 V
Output current	≤ 30 mA

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

Ripple	< 20 mV _{PP} (600 Ω)
--------	-------------------------------

Connection data

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross-section rigid	0.2 mm ² ... 2.5 mm ² (with ferrule) 0.14 mm ² ... 2.5 mm ² (without ferrule)
Conductor cross-section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12 (flexible)

Ex data

Ex installation (EPL)	Gc Div. 2
-----------------------	--------------

Signaling

Status display	Green LED (supply voltage)
----------------	----------------------------

Dimensions

Width	6.2 mm
Height	109.81 mm
Depth	119.2 mm

Material specifications

Color	gray (RAL 7042)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (not assessed by UL)
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	⚡ II 3 G Ex ec IIC T4 Gc
Certificate	BVS 20 ATEX E 014X

IECEX

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

Identification	Ex ec IIC T4 Gc
Certificate	IECEX BVS 20.0010X

CCC / China-Ex

Identification	Ex ec IIC T4 Gc
----------------	-----------------

UL, USA/Canada

Identification	UL 508 Listed
	Class I, Div. 2, Groups A, B, C, D T6
	Class I, Zone 2, Group IIC T6

Shipbuilding approval

Certificate	DNV GL TAA000021E Rev. 1
-------------	--------------------------

Shipbuilding data

Temperature	B
Humidity	B
Vibration	A
EMC	A
Enclosure	Required protection according to the Rules shall be provided upon installation on board

EMC data

Electromagnetic compatibility	Conformance with EMC directive
Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.

Noise emission

Standards/regulations	EN 61000-6-4
-----------------------	--------------

Standards and regulations

GB Standard

Standards/regulations	GB/T 3836.1
	GB/T 3836.3

Mounting

Mounting type	DIN rail mounting
Assembly note	The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.
Mounting position	any

MINI MCR-2-SPS-24-15-PT - Constant voltage source




1033201

<https://www.phoenixcontact.com/pc/products/1033201>

Drawings

Block diagram

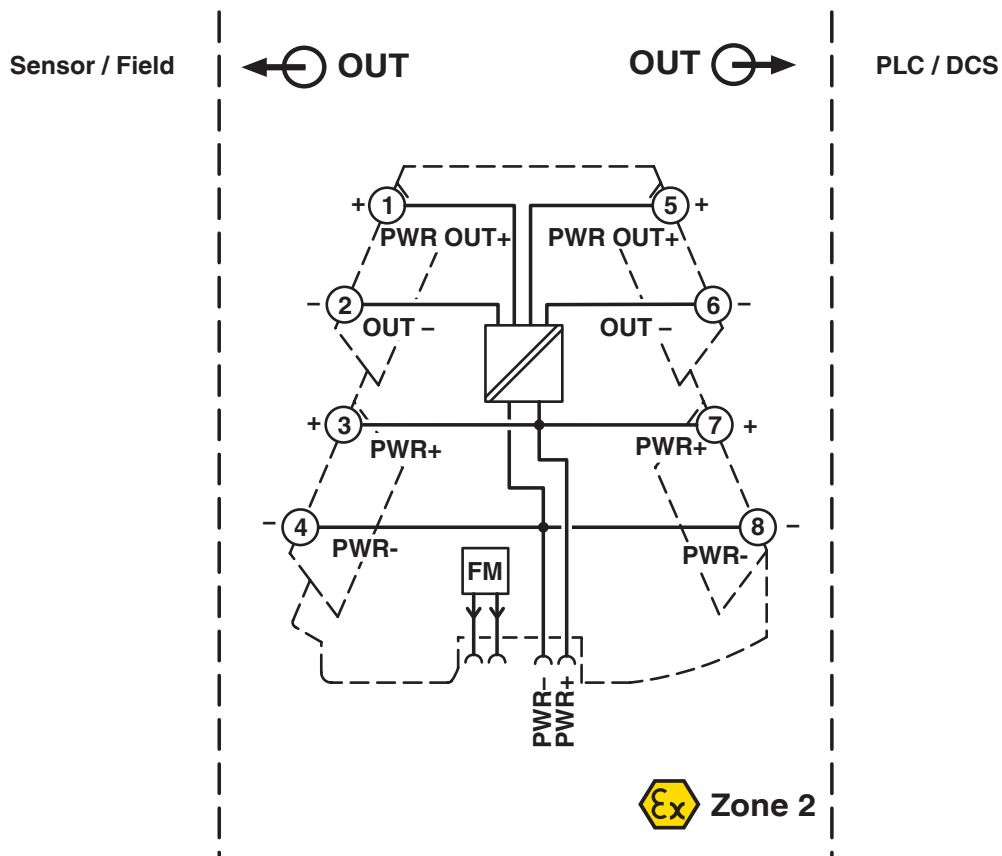

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1033201>



UL Listed

Approval ID: E238705



cUL Listed

Approval ID: E238705

DNV

Approval ID: TAA000021E



IECEx

Approval ID: IECEx BVS 20.0010X



cUL Listed

Approval ID: E196811



UL Listed

Approval ID: E196811



ATEX

Approval ID: BVS 20 ATEX E 014X



CCC

Approval ID: 2022122303115966

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

Classifications

ECLASS

ECLASS-13.0	27210192
ECLASS-15.0	27210192

ETIM

ETIM 9.0	EC002498
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol(CAS: 79-94-7)
SCIP	9b057950-7862-4212-aef1-e01d5f7467d5

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201


<https://www.phoenixcontact.com/pc/products/1033201>

Accessories

ME 6,2 TBUS-2 1,5/5-ST-3,81 GY - DIN rail bus connector

2695439

<https://www.phoenixcontact.com/pc/products/2695439>




DIN rail bus connector (TBUS), 5-pos., for bridging the supply voltage, can be snapped onto NS 35/... DIN rail in accordance with EN 60715

ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - DIN rail bus connector

2869728

<https://www.phoenixcontact.com/pc/products/2869728>



DIN rail bus connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

FASTCON PRO-SET - Connector set

2906227

<https://www.phoenixcontact.com/pc/products/2906227>



FASTCON Pro plug set consisting of four plugs with screw connection, one for each position on the module. Suitable for all MINI Analog Pro modules.

FASTCON PRO-SET-PT - Connector set

2906228

<https://www.phoenixcontact.com/pc/products/2906228>



FASTCON Pro plug set consisting of four plugs with push-in connection, one for each position on the module. Suitable for all MINI Analog Pro modules.

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

UCT-EM (30X5) - Marker for end clamp

0801505

<https://www.phoenixcontact.com/pc/products/0801505>



Marker for end clamp, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm

UCT-EM (30X5) CUS - Marker for end clamp

0801589

<https://www.phoenixcontact.com/pc/products/0801589>



Marker for end clamp, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snapped into marker carrier, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

SK 5,0 WH:REEL - Marker strip

0805221

<https://www.phoenixcontact.com/pc/products/0805221>



Marker strip, Roll, white, unmarked, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 90000 mm

UC-EMLP (15X5) - Plastic label

0819301

<https://www.phoenixcontact.com/pc/products/0819301>



Plastic label, Sheet, white, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm

MINI MCR-2-SPS-24-15-PT - Constant voltage source




1033201

<https://www.phoenixcontact.com/pc/products/1033201>

UC-EMLP (15X5) YE - Plastic label

0822615

<https://www.phoenixcontact.com/pc/products/0822615>



Plastic label, Sheet, yellow, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm

UC-EMLP (15X5) CUS - Plastic label

0824550

<https://www.phoenixcontact.com/pc/products/0824550>



Plastic label, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: adhesive, text field height: 5 mm, text field width: 15 mm

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201


<https://www.phoenixcontact.com/pc/products/1033201>

UC-EMLP (15X5) YE CUS - Plastic label

0824551

<https://www.phoenixcontact.com/pc/products/0824551>

Plastic label, can be ordered: by sheet, yellow, labeled according to customer specifications, mounting type: adhesive, text field height: 5 mm, text field width: 15 mm



UC-EMLP (15X5) SR - Plastic label

0828095

<https://www.phoenixcontact.com/pc/products/0828095>

Plastic label, Sheet, silver, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm



MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

UC-EMLP (15X5) SR CUS - Plastic label

0828099

<https://www.phoenixcontact.com/pc/products/0828099>



Plastic label, can be ordered: by sheet, silver, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm

US-EMLP (15X5) - Plastic label

0828790

<https://www.phoenixcontact.com/pc/products/0828790>



Plastic label, Card, white, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

US-EMLP (15X5) YE - Plastic label

0828873

<https://www.phoenixcontact.com/pc/products/0828873>



Plastic label, Card, yellow, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm

US-EMLP (15X5) SR - Plastic label

0828874

<https://www.phoenixcontact.com/pc/products/0828874>



Plastic label, Card, silver, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

US-EMLP (15X5) CUS - Plastic label

0830076

<https://www.phoenixcontact.com/pc/products/0830076>

Plastic label, Card, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm



US-EMLP (15X5) YE CUS - Plastic label

0830077

<https://www.phoenixcontact.com/pc/products/0830077>

Plastic label, Card, can be ordered: by card, yellow, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm



MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

US-EMLP (15X5) SR CUS - Plastic label

0830078

<https://www.phoenixcontact.com/pc/products/0830078>

Plastic label, Card, can be ordered: by card, silver, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm



UCT-EM (30X5) YE - Marker for end clamp

0830340

<https://www.phoenixcontact.com/pc/products/0830340>

Marker for end clamp, Sheet, yellow, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm



MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

UCT-EM (30X5) YE CUS - Marker for end clamp

0830348

<https://www.phoenixcontact.com/pc/products/0830348>



Marker for end clamp, can be ordered: by sheet, yellow, labeled according to customer specifications, mounting type: snapped into marker carrier, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm

EMG 30-SP- 4K7LIN - Setpoint adjuster

2940252

<https://www.phoenixcontact.com/pc/products/2940252>



Setpoint value potentiometer, to set setpoints individually, resistance value 4,7 k Ω

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

EMG 30-SP-10K LIN - Setpoint adjuster

2942124

<https://www.phoenixcontact.com/pc/products/2942124>

Setpoint value potentiometer, to set setpoints individually, resistance value 10 k Ω



MINI MCR-2-PTB - Power terminal block

2902066

<https://www.phoenixcontact.com/pc/products/2902066>

Power terminal with plug-in connection technology for delivering the supply voltage to the DIN rail connector. Monitoring of the supply voltages in combination with the fault monitoring module. Screw connection technology



MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

MINI MCR-2-PTB-PT - Power terminal block

2902067

<https://www.phoenixcontact.com/pc/products/2902067>



Power terminal with plug-in connection technology for delivering the supply voltage to the DIN rail connector. Monitoring of the supply voltages in combination with the fault monitoring module. Push-in connection technology

QUINT4-SYS-PS/1AC/24DC/2.5/SC - Power supply

2904614

<https://www.phoenixcontact.com/pc/products/2904614>



Primary-switched power supply, QUINT POWER, screw connection, DIN rail mounting, supply of devices possible via the TBUS DIN rail connector, protective coating, input: single-phase, output: 24 V DC/2.5 A

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

MINI MCR-2-FM-RC - Monitoring block

2904504

<https://www.phoenixcontact.com/pc/products/2904504>



Fault monitoring module with plug-in connection technology for evaluating and reporting group errors from the FM system and for monitoring the supply voltages. Error message via N/C contact. Screw connection technology, standard configuration

MINI MCR-2-FM-RC-PT - Monitoring block

2904508

<https://www.phoenixcontact.com/pc/products/2904508>



Fault monitoring module with plug-in connection technology for evaluating and reporting group errors from the FM system and for monitoring the supply voltages. Error message via N/C contact. Push-in connection technology, standard configuration

MINI MCR-2-SPS-24-15-PT - Constant voltage source



1033201

<https://www.phoenixcontact.com/pc/products/1033201>

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/pc/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com