


2774237
<https://www.phoenixcontact.com/in/products/2774237>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Initiator/actuator terminal block, Current and voltage are determined by the plug used., nom. voltage: 250 V, nominal current: 15 A, 1st, 2nd and 3rd level, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², mounting: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Terminal blocks with red and green LEDs are available for optical signaling of the initiator and actuator wiring

Commercial data

Item number	2774237
Packing unit	50 pc
Minimum order quantity	1 pc
Sales key	BE1
Product key	BE1217
GTIN	4017918126773
Weight per piece (including packing)	20.153 g
Weight per piece (excluding packing)	20.153 g
Customs tariff number	85369010
Country of origin	PL

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

Technical data

Notes

General	Current and voltage are determined by the plug used.
---------	--

Product properties

Product type	Sensor/actuator terminal block
Number of connections	6
Number of rows	3
Potentials	3

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²

1st, 2nd and 3rd level

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	8 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, rigid	4 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	15 A

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

Maximum load current	15 A (with 4 mm ² conductor cross-section)
Nominal voltage	250 V (the voltage is determined by the component used)
Nominal cross section	2.5 mm ²

Disconnect level

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	8 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, rigid	4 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	15 A
Maximum load current	15 A (with 4 mm ² conductor cross-section)
Nominal voltage	250 V
Nominal cross section	2.5 mm ²

Dimensions

Width	6.2 mm
Height	72.5 mm
Depth on NS 35/7,5	54.5 mm
Depth on NS 35/15	62 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-40 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
------------------	------

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Long life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	$6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis

Shocks

Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-1
	IEC 60947-7-1

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Drawings

Circuit diagram

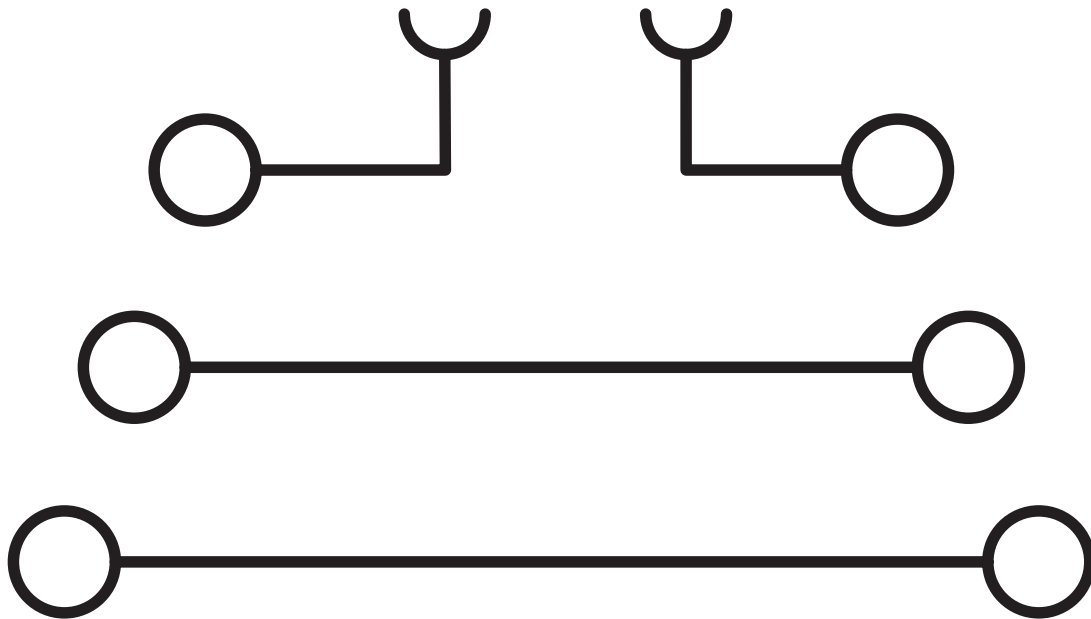

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2774237>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	300 V	15 A	28 - 14	-

 EAC Approval ID: KZ7500651131219505				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
B				
Current and voltage are determined by the connector used	300 V	15 A	30 - 14	-
C				
Current and voltage are determined by the connector used	150 V	15 A	30 - 14	-
D				
	300 V	10 A	30 - 14	-

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

Classifications

ECLASS

ECLASS-13.0	27250112
ECLASS-15.0	27250112

ETIM

ETIM 9.0	EC000900
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

Accessories



Note: Applying some accessories below might limit this product.

EB 80- DIK BU - Insertion bridge

2715940

<https://www.phoenixcontact.com/in/products/2715940>



Insertion bridge, pitch: 6.2 mm, number of positions: 80, color: blue



Max. current carrying capacity: 24 A

EB 10- DIK RD - Insertion bridge

2716774

<https://www.phoenixcontact.com/in/products/2716774>



Insertion bridge, pitch: 6.15 mm, number of positions: 10, color: red



Max. current carrying capacity: 24 A

DIKD 1,5-TG - Initiator/actuator terminal block




2774237

<https://www.phoenixcontact.com/in/products/2774237>

EB 10- DIK BU - Insertion bridge

2716680

<https://www.phoenixcontact.com/in/products/2716680>



Insertion bridge, pitch: 6.15 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 24 A

EB 80- DIK RD - Insertion bridge

2715953

<https://www.phoenixcontact.com/in/products/2715953>



Insertion bridge, pitch: 6.2 mm, number of positions: 80, color: red

 Max. current carrying capacity: 24 A

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



EB 10- DIK GY - Insertion bridge

2715937

<https://www.phoenixcontact.com/in/products/2715937>



Insertion bridge, pitch: 6.15 mm, number of positions: 10, color: gray

 Max. current carrying capacity: 24 A

ST-SILA250-UK 4 - Fuse plug

0921053

<https://www.phoenixcontact.com/in/products/0921053>



Fuse plug, nom. voltage: 250 V, nominal current: 6.3 A, connection method:
Plug-in connection, depth: 45.7 mm, width: 6.1 mm, height: 33.1 mm, color: black

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

ST-SILED 60-UK 4 - Fuse plug

0921040

<https://www.phoenixcontact.com/in/products/0921040>



Fuse plug, nom. voltage: 60 V, nominal current: 6.3 A, connection method: Plug-in connection, depth: 45.7 mm, width: 6.1 mm, height: 33.1 mm, color: black

ST-SILED 24-UK 4 - Fuse plug

0921037

<https://www.phoenixcontact.com/in/products/0921037>



Fuse plug, nom. voltage: 24 V, nominal current: 6.3 A, connection method: Plug-in connection, depth: 45.7 mm, width: 6.1 mm, height: 33.1 mm, color: black

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

ST-SILED 12-UK 4 - Fuse plug

0921024

<https://www.phoenixcontact.com/in/products/0921024>



Fuse plug, nom. voltage: 12 V, nominal current: 6.3 A, connection method: Plug-in connection, depth: 45.7 mm, width: 6.1 mm, height: 33.1 mm, color: black

ATP-DIKD 1,5 - Partition plate

1413285

<https://www.phoenixcontact.com/in/products/1413285>



Partition plate, depth: 60 mm, width: 2 mm, height: 83 mm, color: gray

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



SBS 6:UNBEDRUCKT - Marker card

1007222

<https://www.phoenixcontact.com/in/products/1007222>



Marker card, Card, white, unmarked, can be labeled with: Marker pen, mounting type: latching, snap into flat marker groove, for terminal block width: 6 mm, Number of individual labels: 250, text field height: 6 mm, text field width: 6.1 mm

ST-BE - Component connector

2802316

<https://www.phoenixcontact.com/in/products/2802316>



Component connector, to connect 2-pos. components to the basic terminal block, to be secured with screw-type clamping units, 19 mm high, max. 16 A

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

ST-BE-LA230 - Component connector

2802387

<https://www.phoenixcontact.com/in/products/2802387>



Component plug, with light indicator, to connect 2-pos. components into the basic terminal block, height: 19 mm, color: gray, voltage light indicator: 230 V AC/DC

ST-BE-VP - Component connector

2802332

<https://www.phoenixcontact.com/in/products/2802332>



Component plug, for 4-pos. components, two basic terminal blocks required per plug, 19 mm high

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

ST-BE-LA 24 - Component connector

2802374

<https://www.phoenixcontact.com/in/products/2802374>



Component plug, with light indicator, to connect 2-pos. components into the basic terminal block, height: 19 mm, color: Gray, voltage light indicator: 24 V DC

ST-K 4 - Isolating plug

5025462

<https://www.phoenixcontact.com/in/products/5025462>



Isolating plug, silver-plated, can be used in UK...-TG, UKK...-TG, UDK...-TG, MBK...-TG, DIK...-TG, DOK...-TG, and ZFK...-TG disconnect terminal blocks, color: gray

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

ST-K 4 BU - Isolating plug

3025516

<https://www.phoenixcontact.com/in/products/3025516>



Isolating plug, can be used in UK...-TG, UKK...-TG, UDK...-TG, MBK...-TG, DIK...-TG, DOK...-TG, and ZFK...-TG disconnect terminal blocks, color: blue

ST-K 4 ASEA - Isolating plug

5031003

<https://www.phoenixcontact.com/in/products/5031003>



Isolating plug with spacer, color: gray

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

ST-K 4 SN - Isolating plug

3048470

<https://www.phoenixcontact.com/in/products/3048470>



Isolating plug with tin-plated contacts, can be used in UK...-TG, UKK...-TG, UDK...-TG, MBK...-TG, DIK...-TG, DOK...-TG, and ZFK...-TG disconnect terminal blocks, color: gray

ST-1N4007 - Component connector

2802329

<https://www.phoenixcontact.com/in/products/2802329>



Component plug, with universal diode, to connect 2-pos. components into the basic terminal block, height: 19 mm, color: Gray

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



ST-SI-UK 4 - Fuse plug

0921011

<https://www.phoenixcontact.com/in/products/0921011>



Fuse plug, nom. voltage: 250 V, nominal current: 6.3 A, connection method: Plug-in connection, depth: 45.7 mm, width: 6.1 mm, height: 33.1 mm, color: black

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/in/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/in/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/in/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/in/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/in/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/in/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/in/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/in/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/in/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/in/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/in/products/1051003>



Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/in/products/0824992>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>

ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/in/products/1051016>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/in/products/1051029>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>

ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/in/products/1051032>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/in/products/1051414>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>

ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/in/products/1051430>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/in/products/0818085>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 80, text field height: 10.5 mm, text field width: 5.6 mm

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>

UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/in/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, Number of individual labels: 80, text field height: 10.5 mm, text field width: 5.6 mm

UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/in/products/0828736>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 60, text field height: 10.5 mm, text field width: 5.6 mm

DIKD 1,5-TG - Initiator/actuator terminal block

2774237

<https://www.phoenixcontact.com/in/products/2774237>



UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/in/products/0829602>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, Number of individual labels: 60, text field height: 10.5 mm, text field width: 5.6 mm

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/in/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

DIKD 1,5-TG - Initiator/actuator terminal block



2774237

<https://www.phoenixcontact.com/in/products/2774237>

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/in/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/in/products/0800886>



End clamp, width: 9.5 mm, color: gray

DIKD 1,5-TG - Initiator/actuator terminal block



2774237


<https://www.phoenixcontact.com/in/products/2774237>

E/UK - End bracket

1201442

<https://www.phoenixcontact.com/in/products/1201442>

End bracket, material: PA, mounting type: NS 35/7,5, NS 35/15, color: gray



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/in/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



DIKD 1,5-TG - Initiator/actuator terminal block




2774237

<https://www.phoenixcontact.com/in/products/2774237>

SK 6,2/3,8:FORTL.ZAHLEN - Marker card

0804374

<https://www.phoenixcontact.com/in/products/0804374>



Marker card, Sheet, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 .. 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 6.2 mm, Number of individual labels: 12, text field height: 3.8 mm, text field width: 6.2 mm

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/in/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in