

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Managed Ethernet switch with eight RJ45 ports at 10/100 Mbps and operating temperature of -40°C ... +75°C

## Product description

FL SWITCH 3000 managed industrial Ethernet switches combine extensive network performance and security features with complete IEEE redundancy (STP/RSTP/MST) and 15 ms recovery time extended ring redundancy. Unique web customization provides a simplified user interface for today's applications and scalable functionality for future needs. A comprehensive mix of fiber optic and copper port connections meets a wide range of applications.

## Your advantages

- RJ45 ports support a transmission speed of 10/100 Mbps
- Fiber-optic ports support 100 Mbps
- -40 to 75°C and -10 to 60°C ambient temperature versions
- Secure web-based and SNMP-based management
- Extensive web diagnostics with configurable LED and remote alarm contacts
- Security options with cable locking
- Unique cleanup function hides unused configuration pages, reducing complexity, maintenance and startup times
- Auto negotiation and autocrossing detection simplifies installation and setup

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2891035       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | DN17          |
| Product key                          | DNN125        |
| GTIN                                 | 4046356659383 |
| Weight per piece (including packing) | 1,130 g       |
| Weight per piece (excluding packing) | 901 g         |
| Customs tariff number                | 85176200      |
| Country of origin                    | TW            |

# FL SWITCH 3008T - Industrial Ethernet Switch




2891035

<https://www.phoenixcontact.com/us/products/2891035>

## Technical data

### Dimensions

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 54.4 mm                                                                            |
| Height              | 146.4 mm                                                                           |
| Depth               | 125 mm                                                                             |

### Notes

#### Note on application

|                     |                         |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

#### Utilization restriction

|          |                                                                           |
|----------|---------------------------------------------------------------------------|
| EMC note | EMC: class A product, see manufacturer's declaration in the download area |
|----------|---------------------------------------------------------------------------|

#### Utilization restriction

|            |                                                               |
|------------|---------------------------------------------------------------|
| CCCex note | Use in potentially explosive areas is not permitted in China. |
|------------|---------------------------------------------------------------|

### Material specifications

|                  |          |
|------------------|----------|
| Housing material | Aluminum |
|------------------|----------|

### Mounting

|               |                   |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|

### Interfaces

#### Ethernet (RJ45)

|                               |                                   |
|-------------------------------|-----------------------------------|
| Connection method             | RJ45                              |
| Note on the connection method | Auto negotiation and autocrossing |
| Transmission speed            | 10/100 Mbps                       |
| Transmission physics          | Ethernet in RJ45 twisted pair     |
| Transmission length           | 100 m                             |
| No. of channels               | 8 (RJ45 ports)                    |

### Product properties

|                |                                                       |
|----------------|-------------------------------------------------------|
| Product type   | Switch                                                |
| Product family | Managed Switch 3000                                   |
| Type           | Block design                                          |
| MTTF           | 35.9 Years (MIL-HDBK-217F standard, temperature 25°C, |

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

|                 |                                                                                                                                                                                                                                    |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | operating cycle 100%)                                                                                                                                                                                                              |
| Basic functions | Store and forward switch, Extended Ring and IEEE redundancy, Multicast control, IGMP snooping, trunking, Port and Tagging VLANs, Port and IEEE 802.1x security, SNMP V3 and Https security, SNTP, web customization, user accounts |

## Insulation characteristics

|                  |                           |
|------------------|---------------------------|
| Protection class | III (VDE 0106, IEC 60536) |
|------------------|---------------------------|

## Switch functions

|                                  |                                                                                                                                                                                                                                    |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic functions                  | Store and forward switch, Extended Ring and IEEE redundancy, Multicast control, IGMP snooping, trunking, Port and Tagging VLANs, Port and IEEE 802.1x security, SNMP V3 and Https security, SNTP, web customization, user accounts |
| Signal contact control voltage   | 24 V DC                                                                                                                                                                                                                            |
| Signal contact control current   | 100 mA                                                                                                                                                                                                                             |
| Redundancy                       | ERR (Extended ring redundancy)                                                                                                                                                                                                     |
| Status and diagnostic indicators | LEDs: U <sub>S1</sub> , U <sub>S2</sub> (redundant voltage supply), link and activity per port                                                                                                                                     |

## Security functions

|                 |                                                                                                                                                                                                                                    |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic functions | Store and forward switch, Extended Ring and IEEE redundancy, Multicast control, IGMP snooping, trunking, Port and Tagging VLANs, Port and IEEE 802.1x security, SNMP V3 and Https security, SNTP, web customization, user accounts |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Electrical properties

|                                                 |                                                 |
|-------------------------------------------------|-------------------------------------------------|
| Local diagnostics                               | US1, US2 Supply voltage Green LED               |
|                                                 | LNK/ACT Link status/data transmission Green LED |
|                                                 | 100 Data transmission speed LED red             |
| Maximum power dissipation for nominal condition | 5.04 W                                          |
| Test section                                    | Supply voltage/functional ground 500 V 1 min    |
| Transmission medium                             | Copper                                          |

## Supply

|                             |                                                          |
|-----------------------------|----------------------------------------------------------|
| Supply voltage (DC)         | 24 V DC (redundant)                                      |
| Supply voltage range        | 12 V DC ... 48 V DC                                      |
| Inrush current              | 4.68 A (3.3 ms)                                          |
| Residual ripple             | 3.6 V <sub>PP</sub> (within the permitted voltage range) |
| Typical current consumption | 215 mA (at U <sub>S</sub> = 24 V DC)                     |

## Function

|                                |         |
|--------------------------------|---------|
| Signal contact control voltage | 24 V DC |
| Signal contact control current | 100 mA  |

## Connection data

### Connection technology

|                 |              |
|-----------------|--------------|
| Connection name | Power supply |
| pluggable       | yes          |

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

## Power supply

|                                   |                     |
|-----------------------------------|---------------------|
| Connection method                 | Screw connection    |
| Conductor cross-section, rigid    | 0.2 mm² ... 2.5 mm² |
| Conductor cross-section, flexible | 0.2 mm² ... 2.5 mm² |
| Conductor cross-section AWG       | 24 ... 12           |
| Stripping length                  | 7 mm                |

## Environmental and real-life conditions

### Ambient conditions

|                                          |                                                        |
|------------------------------------------|--------------------------------------------------------|
| Degree of protection                     | IP20                                                   |
| Ambient temperature (operation)          | -40 °C ... 75 °C                                       |
| Ambient temperature (storage/transport)  | -40 °C ... 85 °C                                       |
| Permissible humidity (operation)         | 5 % ... 95 % (non-condensing)                          |
| Permissible humidity (storage/transport) | 5 % ... 95 % (non-condensing)                          |
| Air pressure (operation)                 | 57 kPa ... 108 kPa (up to 4850 m above mean sea level) |
| Air pressure (storage/transport)         | 57 kPa ... 108 kPa (up to 4850 m above mean sea level) |

## Approvals

### Conformity/Approvals

|                                 |                                    |
|---------------------------------|------------------------------------|
| Conformance                     | CE-compliant                       |
| ATEX                            | II 3 G Ex nA nC IIC T4 Gc          |
| EU-type examination certificate | DEMKO 16 ATEX 1616X                |
| IECEX                           | Ex nA nC IIC T4 Gc                 |
| IECEX certificate               | IECEX UL 16.0094X                  |
| UL, USA / Canada                | Class I, Div. 2, Groups A, B, C, D |

## EMC data

|                                 |                                                                |
|---------------------------------|----------------------------------------------------------------|
| Conformance with EMC directives | IEC 61000-6-2 IEC 61000-4-2 (ESD) Criterion B                  |
|                                 | IEC 61000-4-3 (immunity to radiated interference) Criterion A  |
|                                 | IEC 61000-4-4 (burst) Criterion A                              |
|                                 | IEC 61000-4-5 (surge) Criterion B                              |
|                                 | IEC 61000-4-6 (immunity to conducted interference) Criterion A |
|                                 | IEC 61000-4-8 (immunity to magnetic fields) Criterion A        |
|                                 | EN 55022 (emitted interference) Class A                        |
| Noise immunity                  | NEMA TS-2                                                      |
|                                 | EN 61000-6-2:2005                                              |

### Noise emission

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-6-4 |
|-----------------------|--------------|

## System properties

### Functionality

|                 |                                                              |
|-----------------|--------------------------------------------------------------|
| Basic functions | Store and forward switch, Extended Ring and IEEE redundancy, |
|-----------------|--------------------------------------------------------------|

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

|  |                                                                                                                                                                       |
|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Multicast control, IGMP snooping, trunking, Port and Tagging VLANs, Port and IEEE 802.1x security, SNMP V3 and Https security, SNTP, web customization, user accounts |
|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Signaling

|                |                                                                                                |
|----------------|------------------------------------------------------------------------------------------------|
| Status display | LEDs: U <sub>S1</sub> , U <sub>S2</sub> (redundant voltage supply), link and activity per port |
|----------------|------------------------------------------------------------------------------------------------|

# FL SWITCH 3008T - Industrial Ethernet Switch


2891035

<https://www.phoenixcontact.com/us/products/2891035>



## Drawings

Dimensional drawing

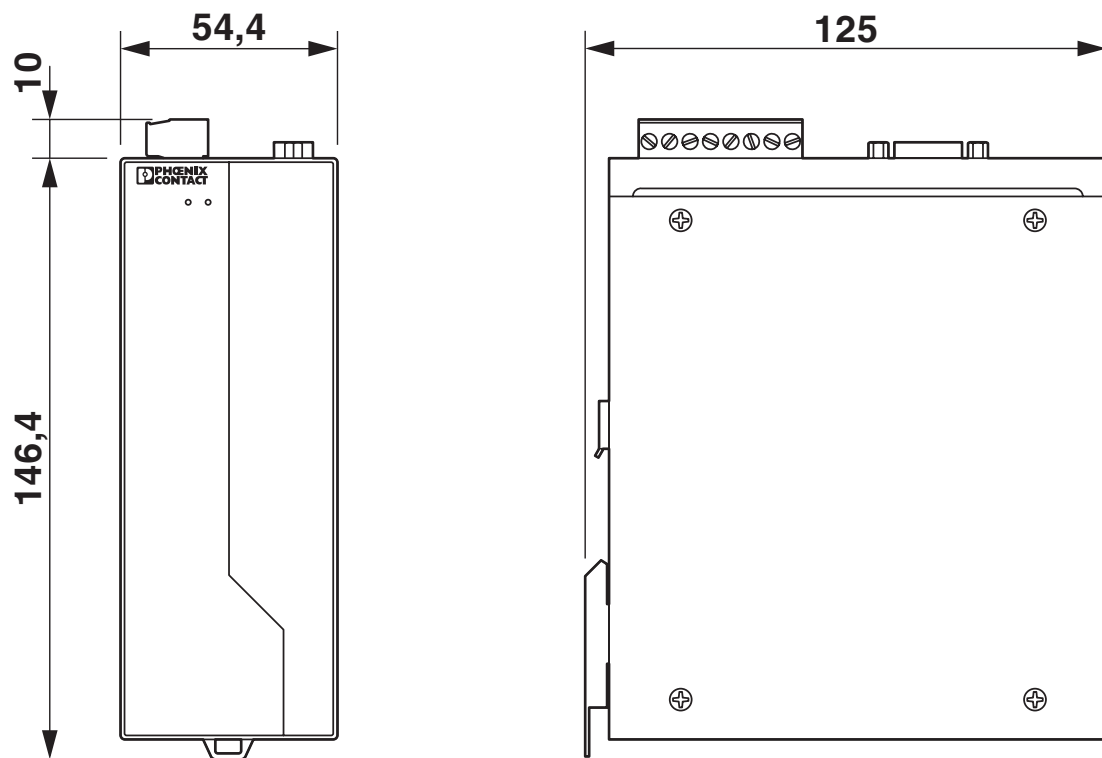

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2891035>



**EAC**

Approval ID: RU D-DE.GB09.B.00312



**UL Listed**

Approval ID: E140324



**cUL Listed**

Approval ID: E140324



**KC**

Approval ID: KCC-REI-PCK-FL289103



**IECEx**

Approval ID: IECEx UL 16.0094X



**cUL Listed**

Approval ID: File E 360692



**UL Listed**

Approval ID: File E 360692



**UL Listed**

Approval ID: E196811



**cUL Listed**

Approval ID: E196811



**ATEX**

Approval ID: DEMKO 16 ATEX 1616X

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 19170401 |
| ECLASS-15.0 | 19170401 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000734 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 43222600 |
|-------------|----------|



Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 6(c), 7(a), 7(c)-I                                                                                                                                                                                                                |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-10                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |
| SCIP                                    | 801d24fa-6880-46e1-878d-2424ed89d35f                                                                                                                                                                                              |

2891035


<https://www.phoenixcontact.com/us/products/2891035>

## Accessories

### MSTB 2,5/ 8-ST - PCB connector

1754562

<https://www.phoenixcontact.com/us/products/1754562>



PCB connector, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Socket, number of potentials: 8, number of rows: 1, number of positions: 8, number of connections: 8, product range: MSTB 2,5/...-ST, pitch: 5 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: COMBICON MSTB 2,5, locking: without, mounting method: without, type of packaging: packed in cardboard

---

### DT-LAN-CAT.6+ - Surge protection device

2881007

<https://www.phoenixcontact.com/us/products/2881007>



Surge protection in accordance with Class E<sub>A</sub> (CAT6<sub>A</sub>), for Gigabit Ethernet (up to 10 Gbps), token ring, FDDI/CDDI, ISDN, DS1. Suitable for Power over Ethernet (PoE++/4PPoE) "Mode A" and "Mode B". RJ45 intermediate plug with separate grounding cable and ground connection snap-on foot for NS 35 DIN rails. Products with similar requirements: DT-LAN-CAT.6A (2908726) und D-LAN-CAT.5-HC (2800763).

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

## FL CAT5 PATCH 0,5 - Patch cable

2832263

<https://www.phoenixcontact.com/us/products/2832263>



Patch cable, CAT5, assembled, 0.5 m

---

## FL CAT5 PATCH 1,0 - Patch cable

2832276

<https://www.phoenixcontact.com/us/products/2832276>



Patch cable, CAT5, assembled, 1 m

# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

## FL CAT5 PATCH 2,0 - Patch cable

2832289

<https://www.phoenixcontact.com/us/products/2832289>




Patch cable, CAT5, assembled, 2 m

---

## NBC-R4AC-R4AC-IE8A/.../... - Patch cable

1411854

<https://www.phoenixcontact.com/us/products/1411854>



Patch cable, degree of protection: IP20, number of positions: 8, 10 Gbps, CAT6<sub>A</sub>, cable outlet: straight, Ethernet

# FL SWITCH 3008T - Industrial Ethernet Switch




2891035

<https://www.phoenixcontact.com/us/products/2891035>

## NBC-R4AC/10G-R4AC/10G-94F/2,0 - Patch cable

1408360

<https://www.phoenixcontact.com/us/products/1408360>




Patch cable, CAT6<sub>A</sub>, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 2.0 m

---

## NBC-R4AC/10G-R4AC/10G-94F/3,0 - Patch cable

1408365

<https://www.phoenixcontact.com/us/products/1408365>



Patch cable, CAT6<sub>A</sub>, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 3.0 m

# FL SWITCH 3008T - Industrial Ethernet Switch

2891035

<https://www.phoenixcontact.com/us/products/2891035>



## FL SEC PAC 4TX - Port Guard Security Element

2832865

<https://www.phoenixcontact.com/us/products/2832865>

Layer1 security elements for 4 RJ45 network connections for use with patch boxes and panels



---

## FL DIN RA - DIN rail adapter

2891053

<https://www.phoenixcontact.com/us/products/2891053>

The FL DIN RA is installed in a standard, 19-inch rack (EIA-310-D, IEC 60297-3-100) to allow DIN rail mounted equipment to be rack mounted.



# FL SWITCH 3008T - Industrial Ethernet Switch

2891035

<https://www.phoenixcontact.com/us/products/2891035>




## FL RJ45 PROTECT CAP - Dust protection

2832991

<https://www.phoenixcontact.com/us/products/2832991>

Dust protection caps for RJ45 socket




---

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



# FL SWITCH 3008T - Industrial Ethernet Switch



2891035

<https://www.phoenixcontact.com/us/products/2891035>

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)