

2902049

https://www.phoenixcontact.com/pc/products/2902049

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Configurable temperature transducer with plug-in connection technology for connecting 2, 3, and 4-conductor resistance thermometers and resistance-type sensors. Configurable via DIP switch or software. Screw connection technology, standard configuration

Product description

Configurable, 3-way isolated temperature transducer with plug-in connection technology. The device is suitable for the connection of resistance thermometers and remote resistance-type sensors with 2, 3, and 4-conductor connection technology. The measured values are converted into a linear and freely adjustable current or voltage signal. You can configure the device using one of the free software solutions. Default settings can also be made directly on the device by simply using the DIP switches (see configuration table). The measuring transducer supports fault monitoring and NFC communication.

Commercial data

Item number	2902049
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DK1125
GTIN	4046356649759
Weight per piece (including packing)	123.1 g
Weight per piece (excluding packing)	110 g
Customs tariff number	85437090
Country of origin	DE



2902049

https://www.phoenixcontact.com/pc/products/2902049

Technical data

Notes

Utilization restriction	
EMC note	EMC: class A product, see manufacturer's declaration in the download area
Product properties	

Product type	Temperature transmitter	
Product family	MINI Analog Pro	
Configuration	DIP switches	
	Software	
	Арр	
Insulation characteristics		
Overvoltage category	II	
Pollution degree	2	

System properties

Eurost	iana	1:4.
Funct	iona	HLΛ

Configuration	DIP switches
	Software
	App

Electrical properties

Electrical isolation	3-way isolation
Protective circuit	Transient protection
Step response (0–99%)	200 ms (2-conductor)
	500 ms (3-conductor)
	500 ms (4-conductor)
Maximum temperature coefficient	0.01 %/K
Transmission error resistance-type sensor	2 Ω
Transmission error resistance thermometer	0.1 % * 350 K / set measuring range; 0.1 % > 350 K (Pt/Ni)
	0.3 % * 200 K / set measuring range; 0.3 % > 200 K (Cu)

Electrical isolation Input/output/power supply

Rated insulation voltage	300 V _{rms}
Test voltage	3 kV AC (50 Hz, 60 s)
Insulation	Reinforced insulation according to IEC/EN 61010-1

Supply



2902049

https://www.phoenixcontact.com/pc/products/2902049

Supply voltage range	9.6 V DC 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Typical current consumption	32 mA (24 V DC)
	63 mA (12 V DC)
Power consumption	≤ 850 mW (at I _{OUT} = 20 mA, 9.6 V DC, 600 Ω load)

Input data

S	io	ın	al
v	'8	,,,	u

Number of inputs	1
Measurement	
Number of inputs	1
Configurable/programmable	Yes
Sensor types (RTD) that can be used	Pt, Ni, Cu sensors
Temperature measuring range	-200 °C 850 °C (Range depends on sensor type, range can be set freely via software or in increments from -150°C to 850°C via DIP switches)
Temperature measuring range	≥ 20 K
Sensor input current	approx. 200 μA
Max. permissible overall conductor resistance	≤ 25 Ω (Per line, RTD in 3- or 4-conductor technology)
	≤ 50 Ω (adjustable, RTD in 2-conductor technology)
Linear resistance measuring range	0 Ω 4000 Ω (Minimum measuring span: 10% of the selected measuring range)
Connection technology	2-, 3-, 4-conductor

Output data

Signal: Voltage/current

Number of outputs	1
Configurable/programmable	Yes
Voltage output signal	0 V 5 V (via DIP switch)
	1 V 5 V (via DIP switch)
	0 V 10 V (via DIP switch)
	10 V 0 V (via DIP switch)
	0 V 10.5 V (can be set via software)
Max. voltage output signal	approx. 12.3 V
Open-circuit voltage	< 17.5 V
Current output signal	0 mA 20 mA (via DIP switch)
	4 mA 20 mA (via DIP switch)
	20 mA 0 mA (via DIP switch)
	20 mA 4 mA (via DIP switch)
	0 mA 21 mA (can be set via software)
Max. current output signal	24.6 mA



2902049

https://www.phoenixcontact.com/pc/products/2902049

Short-circuit current	< 31.5 mA
Load/output load voltage output	≥ 10 kΩ
Load/output load current output	≤ 600 Ω (at 20 mA)
Ripple	< 10 mV _{rms}
	< 10 mV _{rms} (at 600 Ω)
Resolution, outputs (voltage)	1 mV
Resolution, outputs (current)	2 μΑ
Behavior in the event of a sensor error	configurable

Connection data

Connection method	Screw connection
Stripping length	10 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm ² 1.5 mm ² (with ferrule)
	0.14 mm ² 2.5 mm ² (without ferrule)
Conductor cross-section flexible	0.14 mm² 2.5 mm²
Conductor cross-section AWG	24 12 (flexible)
Tightening torque	0.5 Nm 0.6 Nm

Ex data

Ex installation (EPL)	Gc
	Div. 2

Interfaces

Data: IFS interface

Connection method	Micro USB type B

Signaling

Status display	Green LED (supply voltage)
Error indication	Red LED

Dimensions

Width	6.2 mm
Height	109.81 mm
Depth	119.2 mm

Material specifications

Color	gray (RAL 7042)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2



2902049

https://www.phoenixcontact.com/pc/products/2902049

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (not assessed by UL)
Ambient temperature (operation)	-40 °C 70 °C
Ambient temperature (storage/transport)	-40 °C 85 °C
Altitude	≤ 2000 m
Permissible humidity (operation)	5 % 95 % (non-condensing)

Approvals

CE	
Certificate	CE-compliant
ATEX	
Identification	
Certificate	BVS 20 ATEX E 024 X
IECEx	
Identification	Ex ec IIC T4 Gc
Certificate	IECEx BVS 20.0017X
UL, USA/Canada	
Identification	UL 508 Listed
	Class I, Div. 2, Groups A, B, C, D T6
	Class I, Zone 2, Group IIC T6

Shipbuilding approval

EAC Ex

Identification	⊞ଢ LJEx ec IIC T4 Gc
Certificate	BY/112 02.01 TP012 103.01 00079

Shipbuilding data

Temperature	В
Humidity	В
Vibration	A
EMC	A
Enclosure	Required protection according to the Rules shall be provided upon installation on board

EMC data

Electromagnetic compatibility	Conformance with EMC directive
Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal



2902049

https://www.phoenixcontact.com/pc/products/2902049


	deviations.
Noise emission	
Standards/regulations	EN 61000-6-4
Electrostatic discharge	
Standards/regulations	EN 61000-4-2
Electrostatic discharge	
Comments	Safety measures must be taken to prevent electrostatic discharge.
Electromagnetic HF field	
Designation	Electromagnetic RF field
Standards/regulations	EN 61000-4-3
Typical deviation from the measuring range final value	0.06 %
Fast transients (burst)	
Designation	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Typical deviation from the measuring range final value	0.1 %
Surge current load (surge)	
Standards/regulations	EN 61000-4-5
Conducted interference	
Designation	Conducted interferences
Standards/regulations	EN 61000-4-6
Typical deviation from the measuring range final value	0.07 %
andards and regulations	
Electrical isolation	3-way isolation
punting	
Mounting type	DIN rail mounting
Assembly note	The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.
Mounting position	any



2902049

https://www.phoenixcontact.com/pc/products/2902049

Drawings

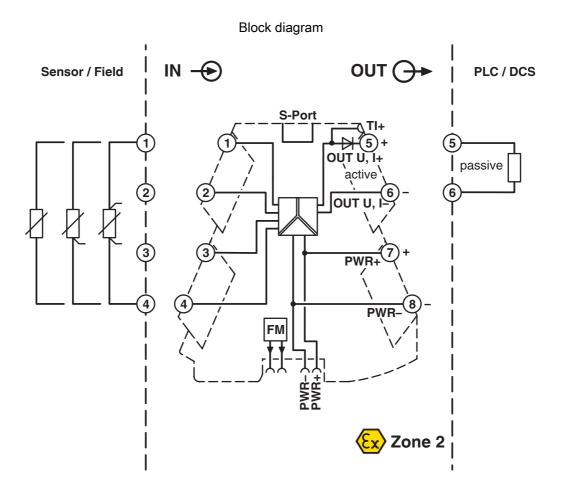



2902049

https://www.phoenixcontact.com/pc/products/2902049

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/2902049



DNV GL

Approval ID: TAA00002UA



UL Listed

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705



IECEx

Approval ID: IECEx_BVS_20.0017X



cUL Listed

Approval ID: E196811



UL Listed

Approval ID: E196811



ATEX

Approval ID: BVS 20 ATEX E 024 X



EAC Ex

Approval ID: TP012 103.01 00079



2902049

https://www.phoenixcontact.com/pc/products/2902049

Classifications

ECLASS

	ECLASS-13.0	27210129		
	ECLASS-15.0	27210129		
ETIM				
	ETIM 9.0	EC002919		
UNSPSC				
	UNSPSC 21.0	41112100		



2902049

https://www.phoenixcontact.com/pc/products/2902049

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-l
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacture declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol(CAS: 79-94-7)
SCIP	8ce962e6-a162-40f6-a68f-6e9a910aeaea



2902049


https://www.phoenixcontact.com/pc/products/2902049

Accessories

ME 6,2 TBUS-2 1,5/5-ST-3,81 GY - DIN rail bus connector

2695439

https://www.phoenixcontact.com/pc/products/2695439





ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - DIN rail bus connector

2869728

https://www.phoenixcontact.com/pc/products/2869728

DIN rail bus connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.





2902049

https://www.phoenixcontact.com/pc/products/2902049

TC-D37SUB-AIO16-MP-PS-UNI - Module carrier

2906640

https://www.phoenixcontact.com/pc/products/2906640



Universal Termination Carrier for connecting 16 MINI Analog Pro signal conditioners to digital or analog I/O cards, via D-SUB connector, 37-pos. (1:1 connection), with HART multiplexer connection

TC-D37SUB-ADIO16-MP-P-UNI - Module carrier

2906639

https://www.phoenixcontact.com/pc/products/2906639

Universal Termination Carrier for connecting 16 MINI Analog Pro signal conditioners to digital or analog I/O cards, via D-SUB connector, 37-pos. (1:1 connection)





2902049

https://www.phoenixcontact.com/pc/products/2902049

MINI MCR-2-V8-FLK 16 - System adapter

2901993

https://www.phoenixcontact.com/pc/products/2901993



Eight MINI Analog Pro signal conditioners and measuring transducers can be connected to a controller with minimal cabling effort and without any errors using system adapters and system cabling.

MINI MCR-2-V8-MOD-RTU - Communication module

2905634

https://www.phoenixcontact.com/pc/products/2905634



Eight MINI Analog Pro signal conditioners and measuring transducers are quickly and easily integrated into a Modbus/RTU network via a communication adapter.



2902049

https://www.phoenixcontact.com/pc/products/2902049

MINI MCR-2-V8-MOD-TCP - Communication module

2905635

https://www.phoenixcontact.com/pc/products/2905635



Eight MINI Analog Pro signal conditioners and measuring transducers are quickly and easily integrated into a Modbus/TCP network via a communication adapter.

MINI MCR-2-V8-PB-DP - Communication module

2905636

https://www.phoenixcontact.com/pc/products/2905636



Eight MINI Analog Pro signal conditioners and measuring transducers are quickly and easily integrated into a PROFIBUS DP network via a communication adapter.



2902049

https://www.phoenixcontact.com/pc/products/2902049

MINI MCR-2-V8-PN - Communication module

2905637

https://www.phoenixcontact.com/pc/products/2905637



Eight MINI Analog Pro signal conditioners and measuring transducers can be quickly and easily integrated into a PROFINET network via a communication adapter.

IFS-USB-PROG-ADAPTER - Programming adapter

2811271

https://www.phoenixcontact.com/pc/products/2811271



Programming adapter with USB interface, for programming with software. The USB driver is included in the software solutions for the products to be programmed, such as measuring transducers or motor managers.



2902049

https://www.phoenixcontact.com/pc/products/2902049

IFS-BT-PROG-ADAPTER - Adapter

2905872

https://www.phoenixcontact.com/pc/products/2905872



Bluetooth adapter with micro USB and S-PORT interface for wireless communication with the MINI Analog, MINI Analog Pro, MACX Analog, Interface System Gateways, and PLC logic device series.

TWN4 MIFARE NFC USB ADAPTER - Programming adapter

2909681

https://www.phoenixcontact.com/pc/products/2909681



Near Field Communication (NFC) programming adapter with USB interface for the wireless configuration of NFC-capable products from Phoenix Contact with software. A separate USB driver is not required.



2902049

https://www.phoenixcontact.com/pc/products/2902049

FASTCON PRO-SET - Connector set

2906227

https://www.phoenixcontact.com/pc/products/2906227



FASTCON Pro plug set consisting of four plugs with screw connection, one for each position on the module. Suitable for all MINI Analog Pro modules.

FASTCON PRO-SET-PT - Connector set

2906228

https://www.phoenixcontact.com/pc/products/2906228



FASTCON Pro plug set consisting of four plugs with push-in connection, one for each position on the module. Suitable for all MINI Analog Pro modules.



2902049

https://www.phoenixcontact.com/pc/products/2902049

UCT-EM (30X5) - Marker for end clamp

0801505

https://www.phoenixcontact.com/pc/products/0801505



Marker for end clamp, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm

UCT-EM (30X5) CUS - Marker for end clamp

0801589

https://www.phoenixcontact.com/pc/products/0801589



Marker for end clamp, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snapped into marker carrier, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

SK 5,0 WH:REEL - Marker strip

0805221

https://www.phoenixcontact.com/pc/products/0805221



Marker strip, Roll, white, unmarked, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 90000 mm

UC-EMLP (15X5) - Plastic label

0819301

https://www.phoenixcontact.com/pc/products/0819301



Plastic label, Sheet, white, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

UC-EMLP (15X5) YE - Plastic label

0822615

https://www.phoenixcontact.com/pc/products/0822615



Plastic label, Sheet, yellow, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm

UC-EMLP (15X5) CUS - Plastic label

0824550

https://www.phoenixcontact.com/pc/products/0824550



Plastic label, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: adhesive, text field height: 5 mm, text field width: 15 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

UC-EMLP (15X5) YE CUS - Plastic label

0824551

https://www.phoenixcontact.com/pc/products/0824551



Plastic label, can be ordered: by sheet, yellow, labeled according to customer specifications, mounting type: adhesive, text field height: 5 mm, text field width: 15 mm

UC-EMLP (15X5) SR - Plastic label

0828095

https://www.phoenixcontact.com/pc/products/0828095



Plastic label, Sheet, silver, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

UC-EMLP (15X5) SR CUS - Plastic label

0828099

https://www.phoenixcontact.com/pc/products/0828099



Plastic label, can be ordered: by sheet, silver, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 10, text field height: 5 mm, text field width: 15 mm

US-EMLP (15X5) - Plastic label

0828790

https://www.phoenixcontact.com/pc/products/0828790



Plastic label, Card, white, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

US-EMLP (15X5) YE - Plastic label

0828873

https://www.phoenixcontact.com/pc/products/0828873



Plastic label, Card, yellow, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm

US-EMLP (15X5) SR - Plastic label

0828874

https://www.phoenixcontact.com/pc/products/0828874



Plastic label, Card, silver, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

US-EMLP (15X5) CUS - Plastic label

0830076

https://www.phoenixcontact.com/pc/products/0830076



Plastic label, Card, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm

US-EMLP (15X5) YE CUS - Plastic label

0830077

https://www.phoenixcontact.com/pc/products/0830077



Plastic label, Card, can be ordered: by card, yellow, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

US-EMLP (15X5) SR CUS - Plastic label

0830078

https://www.phoenixcontact.com/pc/products/0830078



Plastic label, Card, can be ordered: by card, silver, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 189, text field height: 5 mm, text field width: 15 mm

UCT-EM (30X5) YE - Marker for end clamp

0830340

https://www.phoenixcontact.com/pc/products/0830340



Marker for end clamp, Sheet, yellow, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm



2902049

https://www.phoenixcontact.com/pc/products/2902049

UCT-EM (30X5) YE CUS - Marker for end clamp

0830348

https://www.phoenixcontact.com/pc/products/0830348



Marker for end clamp, can be ordered: by sheet, yellow, labeled according to customer specifications, mounting type: snapped into marker carrier, Number of individual labels: 24, text field height: 5 mm, text field width: 30 mm

MINI MCR-2-PTB - Power terminal block

2902066

https://www.phoenixcontact.com/pc/products/2902066



Power terminal with plug-in connection technology for delivering the supply voltage to the DIN rail connector. Monitoring of the supply voltages in combination with the fault monitoring module. Screw connection technology



2902049

https://www.phoenixcontact.com/pc/products/2902049

MINI MCR-2-PTB-PT - Power terminal block

2902067

https://www.phoenixcontact.com/pc/products/2902067



Power terminal with plug-in connection technology for delivering the supply voltage to the DIN rail connector. Monitoring of the supply voltages in combination with the fault monitoring module. Push-in connection technology

QUINT4-SYS-PS/1AC/24DC/2.5/SC - Power supply

2904614

https://www.phoenixcontact.com/pc/products/2904614



Primary-switched power supply, QUINT POWER, screw connection, DIN rail mounting, supply of devices possible via the TBUS DIN rail connector, protective coating, input: single-phase, output: 24 V DC/2.5 A



2902049

https://www.phoenixcontact.com/pc/products/2902049

MINI MCR-2-FM-RC - Monitoring block

2904504

https://www.phoenixcontact.com/pc/products/2904504



Fault monitoring module with plug-in connection technology for evaluating and reporting group errors from the FM system and for monitoring the supply voltages. Error message via N/C contact. Screw connection technology, standard configuration

MINI MCR-2-FM-RC-PT - Monitoring block

2904508

https://www.phoenixcontact.com/pc/products/2904508



Fault monitoring module with plug-in connection technology for evaluating and reporting group errors from the FM system and for monitoring the supply voltages. Error message via N/C contact. Push-in connection technology, standard configuration



2902049

https://www.phoenixcontact.com/pc/products/2902049

SZS 0,6X3,5 - Screwdriver

1205053

https://www.phoenixcontact.com/pc/products/1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: $0.6 \times 3.5 \times 100$ mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com