

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822
<https://www.phoenixcontact.com/us/products/2902822>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Constant voltage source, input voltage 9.6 - 30 V DC, output voltage 10 V, 7.5 V, 5 V, 2.5 V DC, electrically isolated, can be configured via DIP switches, screw connection technology, standard configuration

Product description

The 6.2 mm wide configurable MINI MCR-SL-CVS-24-10-5 constant voltage source is used to generate high precision constant voltages. The input voltage can fall between 9.6 V DC and 30 V DC. The DIP switches accessible from the side of the housing enable configuration of the 10 V DC, 5 V DC, 7.5 V DC, and 2.5 V DC output voltages. The input voltage can be applied either via connection terminal blocks on the modules or in conjunction with the DIN rail connector.

Commercial data

Item number	2902822
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C403
Product key	DK1139
GTIN	4046356682428
Weight per piece (including packing)	87.1 g
Weight per piece (excluding packing)	82.88 g
Customs tariff number	85437090
Country of origin	DE

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Constant voltage source
Product family	MINI Analog
Configuration	DIP switches

Insulation characteristics

Overvoltage category	II
Pollution degree	2

System properties

Functionality

Configuration	DIP switches
---------------	--------------

Electrical properties

Setting range comparison	± 300 mV
Electrical isolation between input and output	yes
Maximum power dissipation for nominal condition	300 mW
Maximum temperature coefficient	< 0.01 %/K
Temperature coefficient, typical	< 0.002 %/K
Maximum transmission error	≤ 0.1 % (of final value)
	≤ 0.5 % (Without adjustment)

Electrical isolation Input/output

Rated insulation voltage	50 V AC/DC
Test voltage	1.5 kV AC (50 Hz, 60 s)
Insulation	Basic insulation in accordance with IEC/EN 61010

Supply

Nominal supply voltage	24 V DC
Supply voltage range	9.6 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Max. current consumption	< 25 mA (10 V output with 30 mA load at 24 V DC IN)
	< 65 mA (10 V output with 30 mA load at 9.6 V DC IN)
	< 50 mA (10 V voltage output with 30 mA load at 12 V DC IN)
	< 20 mA (10 V voltage output with 30 mA load at 30 V DC IN)
	< 600 mW (at 24 V IN)

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

Power consumption	< 624 mW (at 9.6 V IN)
	< 564 mW (At 12 V IN)
	< 540 mW (at 30 V IN)

Input data

Signal: Voltage

Voltage input signal	9.6 V DC ... 30 V DC
----------------------	----------------------

Output data


Signal: Voltage

Configurable/programmable	Yes, preconfigured
Max. voltage output signal	10 V DC
	7.5 V DC
	5 V DC
	2.5 V DC
Short-circuit current	approx. 32 mA
Output current	≤ 30 mA
Ripple	< 20 mV _{PP}

Connection data

Connection method	Screw connection
Stripping length	12 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	26 ... 12

Dimensions

Dimensional drawing	
Width	6.2 mm
Height	93.1 mm
Depth	101.2 mm

Material specifications

Color	green (RAL 6021)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

Fire protection for rail vehicles (DIN EN 45545-2) R24

HL 1 - HL 2

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m
Permissible humidity (operation)	5 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UKCA

Certificate	UKCA-compliant
-------------	----------------

UL, USA/Canada

Identification	UL 508 Listed
	Class I, Div. 2, Groups A, B, C, D T6
	Class I, Zone 2, Group IIC

Shipbuilding approval

Certificate	DNV GL TAA00002R0
-------------	-------------------

Shipbuilding data

Temperature	B
Humidity	B
Vibration	B
EMC	B
Enclosure	Required protection according to the Rules shall be provided upon installation on board

EMC data

Electromagnetic compatibility	Conformance with EMC directive
Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.

Noise emission

Standards/regulations	EN 61000-6-4
-----------------------	--------------

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Comments	Safety measures must be taken to prevent electrostatic
----------	--

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

	discharge.
--	------------

Electromagnetic HF field

Designation	Electromagnetic RF field
Standards/regulations	EN 61000-4-3
Typical deviation from the measuring range final value	3 %

Electromagnetic HF field

Comments	Criterion A
----------	-------------

Fast transients (burst)

Designation	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Typical deviation from the measuring range final value	3 %

Fast transients (burst)

Comments	Criterion B
----------	-------------

Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge current load (surge)

Comments	Criterion B
----------	-------------

Conducted interference

Designation	Conducted interferences
Standards/regulations	EN 61000-4-6
Typical deviation from the measuring range final value	0.5 %

Conducted interference

Comments	Criterion A
----------	-------------

Mounting

Mounting type	DIN rail mounting
Assembly note	The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.
Mounting position	any


MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>


Drawings

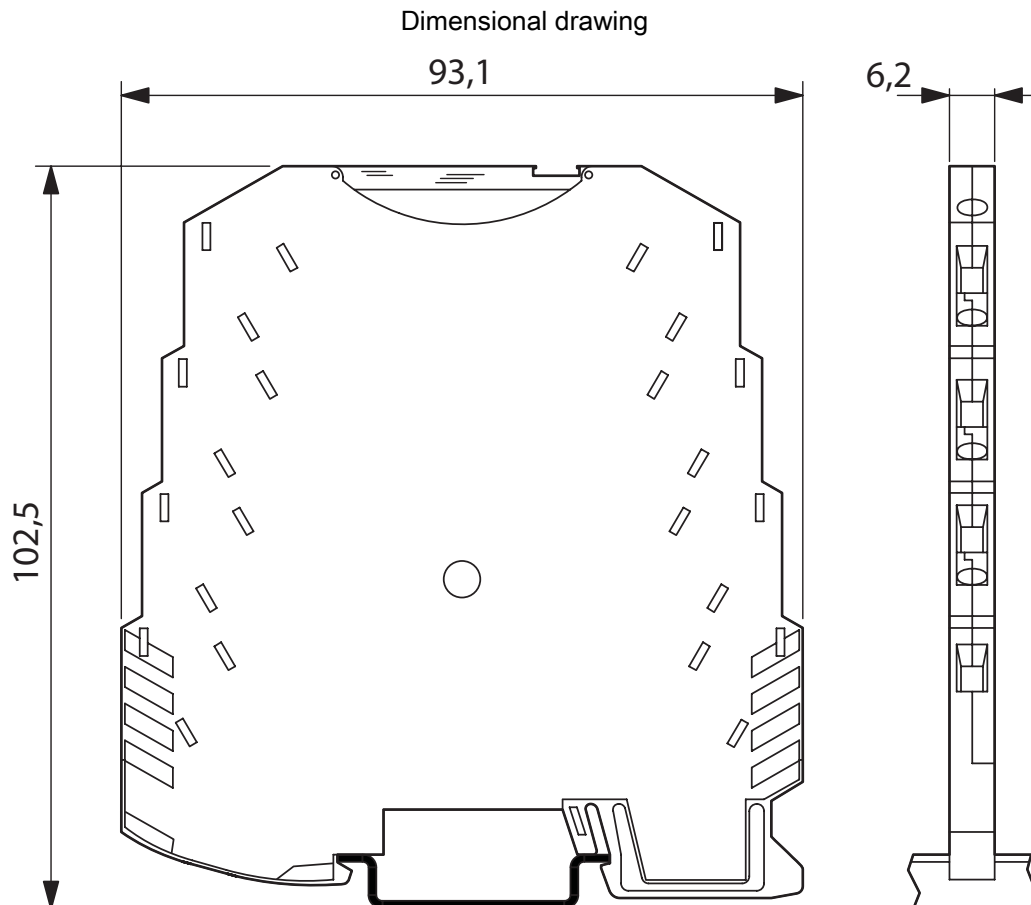

<https://www.phoenixcontact.com/us/products/2902822>



Block diagram

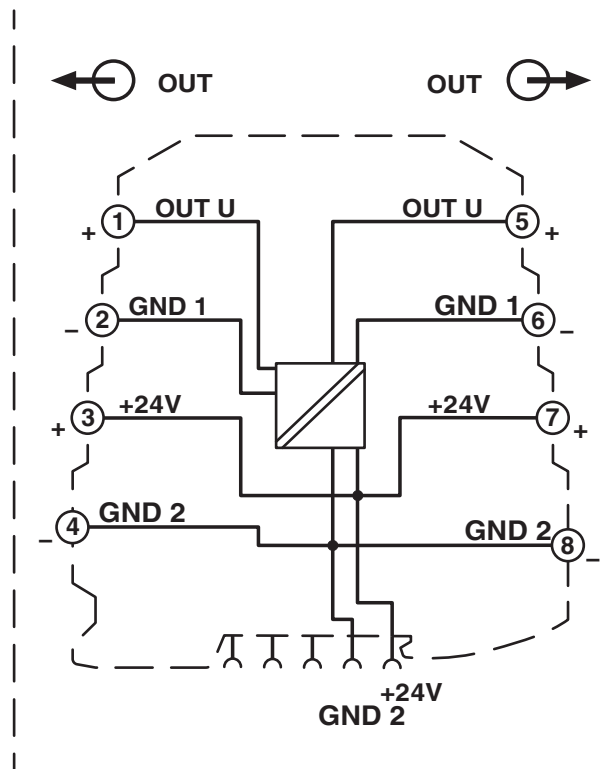

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2902822>



UL Listed

Approval ID: E238705



cUL Listed

Approval ID: E238705

DNV

Approval ID: TAA00002R0



cUL Listed

Approval ID: E199827



UL Listed

Approval ID: FILE E 199827

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

Classifications

ECLASS

ECLASS-13.0	27210192
ECLASS-15.0	27210192

ETIM

ETIM 9.0	EC002498
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d592cdca-41a8-4f80-85c7-fff7473dbfaa

EF3.0 Climate Change

CO2e kg	1.187 kg CO2e
---------	---------------

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822


<https://www.phoenixcontact.com/us/products/2902822>

Accessories

ME 6,2 TBUS-2 1,5/5-ST-3,81 GY - DIN rail bus connector

2695439

<https://www.phoenixcontact.com/us/products/2695439>




DIN rail bus connector (TBUS), 5-pos., for bridging the supply voltage, can be snapped onto NS 35/... DIN rail in accordance with EN 60715

ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - DIN rail bus connector

2869728

<https://www.phoenixcontact.com/us/products/2869728>



DIN rail bus connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

TC-D37SUB-AIO16-M-PS-UNI - Module carrier

2902934

<https://www.phoenixcontact.com/us/products/2902934>



Universal termination carrier for connecting 16 MINI Analog signal conditioners to digital or analog I/O cards, via D-SUB connector, 37-pos. (1:1 connection), with HART multiplexer connection

TC-D37SUB-ADIO16-M-P-UNI - Module carrier

2902933

<https://www.phoenixcontact.com/us/products/2902933>



Universal termination carrier for connecting 16 MINI Analog signal conditioners to digital or analog I/O cards, via D-SUB connector, 37-pos. (1:1 connection)

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

MINI MCR DKL - Transparent cover

2308111

<https://www.phoenixcontact.com/us/products/2308111>



Fold up transparent cover for MINI MCR modules with additional labeling option using insert strips and flat Zack marker strip 6.2 mm

MINI MCR-DKL-LABEL - Marking label

2810272

<https://www.phoenixcontact.com/us/products/2810272>



Label for extended marking of MINI MCR modules in connection with the MINI MCR-DKL

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

MINI MCR-SL-PTB - Power terminal block

2864134

<https://www.phoenixcontact.com/us/products/2864134>



MCR power terminal block for supplying several MINI Analog modules via the DIN rail connector, with screw connection, maximum current consumption of up to 2 A

QUINT4-SYS-PS/1AC/24DC/2.5/SC - Power supply

2904614

<https://www.phoenixcontact.com/us/products/2904614>



Primary-switched power supply, QUINT POWER, screw connection, DIN rail mounting, supply of devices possible via the TBUS DIN rail connector, protective coating, input: single-phase, output: 24 V DC/2.5 A

MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com