

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



1AC/1AC/750 VA uninterruptible power supply with integrated battery, lead AGM, VRLA technology, 24 V DC, 4 Ah for 120 V AC applications.

Product description

UPS modules with integrated battery are particularly space-saving: the UPS module and battery are combined in one housing. The TRIO AC UPS ensures seamless transition to battery operation thanks to the pure sine curve. Connected industrial PCs can be shut down safely via the integrated USB interface.

Your advantages

- Smooth transition, thanks to the pure sine curve: the sine generated in battery operation is synchronous with the mains previously used for supply
- Space saving: Combination of UPS module and battery in the same housing
- Long buffer times with integrated VRLA battery, can be extended with additional battery module
- USB interface for connection to higher-level controllers such as industrial PCs
- Startup from the energy storage system possible, even without mains input

Commercial data

Item number	2905908
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CMUO15
GTIN	4055626007397
Weight per piece (including packing)	6,359 g
Weight per piece (excluding packing)	6,098 g
Customs tariff number	85371091
Country of origin	DE

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Technical data

Notes

General

Note on the battery	This product contains a battery with a limited shelf life that must be charged every few months. The product packaging indicates when the battery must be started up or recharged. The general shelf life can be found in the energy storage devices area under "Latest startup".
---------------------	---

Input data

AC operation

Input voltage	120 V AC
Input voltage range	96 V AC ... 138 V AC
Voltage type of supply voltage	AC
Frequency range (f_N)	45 Hz ... 55 Hz 55 Hz ... 65 Hz
Current consumption	6 A (max.)
Power factor (cos phi)	0.8
Input fuse	10 A 400 V gRL
Permissible backup fuse	B10 B16 Listed breaker

Digital Control (configurable)

Designation	Remote
Low signal	Connection to SGnd with < 2.7 k Ω
High signal	Open (> 35 k Ω between Remote and SGnd)

Digital Control Low-Active (configurable)

Battery-operated start 120 V AC low signal	Connection to SGnd with < 2.7 k Ω
Battery-operated start 120 V AC high signal	Open (> 200 k Ω between Bat.-Start and SGnd)

Output data

Classification according to IEC 62040-3	VFD-SS-311
Efficiency	> 95 % (100% load, with charged battery) ~ 81 % (100 % load)
Nominal output voltage	120 V AC
Form of output voltage	Pure sine
Nominal output current (I_N)	6 A
Bridging time	60 s
UPS connection in parallel	no
UPS connection in series	no
Apparent power	750 VA
Nominal power	600 W (Real power)

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Crest factor	2.8
Switch-over time	< 10 ms
Connection in parallel	no
Connection in series	no

Mains operation

Nominal output voltage	120 V AC
Nominal output current (I_N)	6 A (750 VA)

Battery operation

Nominal output voltage	120 V AC
Nominal output current (I_N)	6 A (750 VA)
Frequency (after automatic detection in mains operation)	50 Hz
	60 Hz

Signal: Alarm

Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA

Signal: Battery mode

Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA

Signal: Ready

Output voltage	24 V (SELV)
Continuous load current	≤ 20 mA

Signal:

Signal ground SGnd	Reference potential for Bat.-Mode, Ready, Remote, and Bat.-Start
--------------------	--

Energy storage

Nominal voltage U_N	24 V DC
Charging current	0.7 A ... 1.1 A
Nominal capacity	4 Ah
Nominal capacity range	4 Ah
Charging time	7 h
Buffer period	20 min (100 W)
	4 min (300 W)
	1 min (600 W)
Latest startup date (battery only)	6 Months (0 °C ... 20 °C)
Latest startup (battery only) - range	6 Months ... 3 Months (20 °C ... 30 °C)
	3 Months ... 1 Months (30 °C ... 40 °C)
Battery technology	Lead rechargeable battery module
Memory medium	Lead rechargeable battery module
Accumulator type	2x Panasonic UP-VW1220P1 / BB Battery HR4.2-12FR

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Can be extended with external battery	1x 24 V 4 Ah
Battery fuse	40 A, 32 V

Connection data

Input

Connection method	Push-in connection
Conductor cross-section, rigid min.	0.2 mm ²
Conductor cross-section, rigid max.	4 mm ²
Conductor cross-section flexible min.	0.2 mm ²
Conductor cross-section flexible max.	2.5 mm ²
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	12
Stripping length	10 mm

Output

Connection method	Push-in connection
Conductor cross-section, rigid min.	0.2 mm ²
Conductor cross-section, rigid max.	4 mm ²
Conductor cross-section flexible min.	0.2 mm ²
Conductor cross-section flexible max.	2.5 mm ²
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	12
Stripping length	10 mm

Signal

Connection method	Push-in connection
Conductor cross-section, rigid min.	0.2 mm ²
Conductor cross-section, rigid max.	1.5 mm ²
Conductor cross-section flexible min.	0.2 mm ²
Conductor cross-section flexible max.	1.5 mm ²
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	16
Stripping length	8 mm

Signal

Connection method	Push-in connection
Conductor cross-section, rigid min.	0.2 mm ²
Conductor cross-section, rigid max.	1.5 mm ²
Conductor cross-section flexible min.	0.2 mm ²
Conductor cross-section flexible max.	1.5 mm ²
Conductor cross-section AWG min.	24
Conductor cross-section AWG max.	16
Stripping length	8 mm

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Interfaces

Interface	MINI-USB type B
Maximum cable length	3 m

Signaling

Types of signaling	LED
--------------------	-----

Signal output: Transistor output, active

Signalization designation	Alarm
Status display	LED
Color	red

Signal output: Transistor output, active

Signalization designation	Battery mode
Status display	LED
Color	yellow

Signal output: Transistor output, active

Signalization designation	Ready
---------------------------	-------

Signal output

Status display	LED
Color	green

Signal output

Signalization designation	Battery charge
Status display	LED
Color	yellow

Signal output

Signalization designation	Service
Status display	LED
Color	red

Electrical properties

Number of phases	1
------------------	---

Product properties

Product type	AC UPS
Product family	TRIO AC UPS – UPS with integrated battery
MTBF (IEC 61709, SN 29500)	> 206000 h (40 °C)

Insulation characteristics

Protection class	I
Overvoltage category	II

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Degree of pollution	3
Life expectancy (electrolytic capacitors)	
Time	32861 h

Dimensions

Width	210 mm
Height	170 mm
Depth	136 mm

Installation dimensions

Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

Material specifications

Type of housing	DX51D+AZ (steel sheet / Galvalume)
Hood version	PC + ABS

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 40 °C
Ambient temperature (storage/transport)	-15 °C ... 40 °C (with charged energy storage device)
Maximum altitude	≤ 3000 m (> 2000 m, observe derating)
Climatic class	3K3 (in acc. with EN 60721)
Max. permissible relative humidity (operation)	≤ 95 % (25 °C, non-condensing)
Shock	20g in all directions (EN 60068-2-27)
	30g in each space direction with UWA 130
Vibration (operation)	5 Hz ... 100 Hz, 0.7g (EN 60068-2-6)

Standards and regulations

Standards

Standard uninterruptible power supply systems	EN 62040-1
---	------------

Approvals

UL approvals	UL/C-UL Recognized UL 1778
--------------	----------------------------

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Interference emission	Noise emission in accordance with EN 62040-2
Noise immunity	Immunity in accordance with EN 62040-2
Noise immunity	Immunity in accordance with EN 61000-6-1 (residential), EN 61000-6-2 (industrial), and EN 61000-6-5 (switching devices), IEC/EN 61850-3 (power supply)

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	6 kV (Test Level 3)
Discharge in air	8 kV (Test Level 3)
Comments	Criterion A

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	80 MHz ... 3 GHz
Test field strength	10 V/m
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	2 kV (Test Level 3 - asymmetrical)
	2 kV (Test Level 3 - asymmetrical)
Output	2 kV (Test Level 3 - asymmetrical)
Signal	2 kV (Test Level 3 - asymmetrical)
	2 kV (Test Level 3 - asymmetrical)
Comments	Criterion A (B for USB)

Surge voltage load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge voltage load (surge)

Input	1 kV (Test Level 2 - symmetrical)
	2 kV (Test Level 3 - asymmetrical)
Output	1 kV (Test Level 2 - symmetrical)
	2 kV (Test Level 3 - asymmetrical)
Signal	1 kV (Test Level 2 - asymmetrical)
Comments	Criterion A

Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

Conducted interference

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V

Power frequency magnetic field

Standards/regulations	EN 61000-4-8
Frequency	60 Hz
Test field strength	100 A/m
Comments	Criterion A

Emitted interference

Emitted radio interference in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential
--	--

Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.


TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908
<https://www.phoenixcontact.com/pc/products/2905908>

Drawings

Block diagram

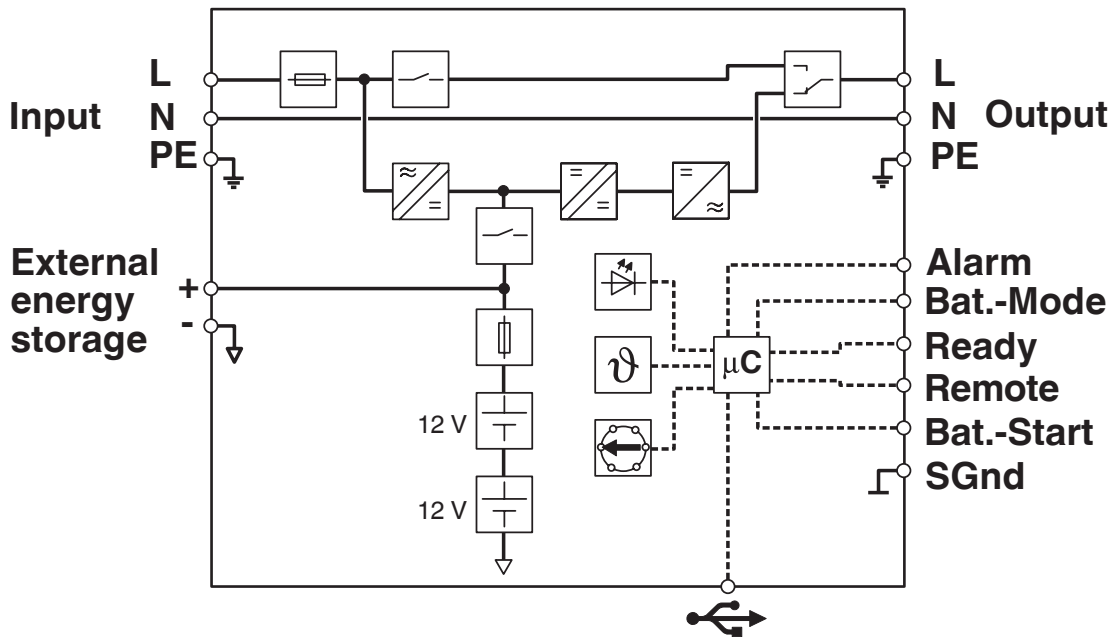

Block diagram

Graphic

Load Current	Buffertime													
	Minutes												Hours	
	1	1.5	2	4	6	8	10	15	20	30	40	50	1	1.5
50 W												2x	2x	2x
100 W										2x	2x	2x		
150 W								2x	2x	2x				
200 W							2x	2x	2x					
250 W						2x	2x	2x						
300 W					2x	2x	2x							
400 W				2x	2x	2x								
500 W			2x	2x	2x									
600 W		2x	2x	2x										

2x: In this case, two battery modules of the same capacity are required. The data is based on an ambient temperature of +25 °C at the start of use.

Buffer times for TRIO AC UPS

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2905908>



cUL Recognized
Approval ID: FILE E 342453



UL Recognized
Approval ID: FILE E 342453



EAC
Approval ID: RU S-DE.BL08.W.00764



EAC
Approval ID: RU-DE.B.00184/20

DNV

Approval ID: TAA00000BM



KC
Approval ID: R-R-PCK-2905908



cUL Recognized
Approval ID: FILE E 359066



UL Recognized
Approval ID: FILE E 359066

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Classifications

ECLASS

ECLASS-13.0	27040705
ECLASS-15.0	27040705

ETIM

ETIM 9.0	EC000382
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908
<https://www.phoenixcontact.com/pc/products/2905908>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-3
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	387c5bfb-b3a6-451f-9b8a-416d41c19289

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

Accessories

TRIO-BAT/PB/24DC/4AH - Battery module

1394730

<https://www.phoenixcontact.com/pc/products/1394730>



Battery module (device with battery), VRLA-AGM, 24 V DC, 4 Ah

UPS-BAT/PB/24DC/4AH - Battery module

1274117

<https://www.phoenixcontact.com/pc/products/1274117>



Battery module (device with battery), VRLA-AGM, 24 V DC, 4 Ah, automatic detection and communication with QUINT UPS-IQ

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

UPS-BAT-KIT/PB/2X12V/4AH - Uninterruptible power supply replacement battery

1283116

<https://www.phoenixcontact.com/pc/products/1283116>



Replacement battery, VRLA-AGM, 2x12 V DC, 4 Ah. Only for 1274117 UPS-BAT/PB/24DC/4AH, 2320267 QUINT-UPS/24DC/24DC/10/3.4AH from V/C 06, 2905908 TRIO-UPS-2G/1AC/1AC/120V/750VA, and 2905909 TRIO-UPS-2G/1AC/1AC/230V/750VA

MINI-SCREW-USB-DATACABLE - Data cable

2908217

<https://www.phoenixcontact.com/pc/products/2908217>



Used for communication between an industrial PC and Phoenix Contact devices with USB-Mini-B connection.

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

PLT-SEC-T3-120-FM-UT - Type 3 surge protection device

2907918

<https://www.phoenixcontact.com/pc/products/2907918>



Type 2/3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 120 V AC/DC

UWA 130 - Mounting adapter

2901664

<https://www.phoenixcontact.com/pc/products/2901664>



2-piece universal wall adapter for securely mounting the device in the event of strong vibrations. The profiles that are screwed onto the side of the device are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

TRIO-UPS-2G/1AC/1AC/120V/750VA - Uninterruptible power supply



2905908

<https://www.phoenixcontact.com/pc/products/2905908>

FUSE 10A/400V GRL - Fuse

2908358

<https://www.phoenixcontact.com/pc/products/2908358>

Fuse, nominal current: 10 A, length: 31.8 mm, diameter: 6.35 mm



FUSE 40A/32V ATOF - Fuse

2908357

<https://www.phoenixcontact.com/pc/products/2908357>

Fuse, nominal current: 40 A, length: 19 mm, width: 5 mm, height: 18.8 mm



Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com