

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Active QUINT single redundancy module for DIN rail mounting, input: 12 V DC ... 24 V DC, output: 12 V DC ... 24 V DC / 1 x 40 A, incl. mounted UTA 107/30 universal DIN rail adapter

## Product description

Active redundancy module for superior system availability and maximum operational reliability. QUINT S-ORING enables the separate structuring of a redundant system. In combination with the new QUINT POWER power supply, the redundant system is monitored continuously.

## Your advantages

- Consistent redundancy up to the load
- Input voltage and decoupling section monitored on a permanent basis
- Save energy by decoupling with MOSFET

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2907752       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | CM16          |
| Product key                          | CMRI43        |
| GTIN                                 | 4055626231907 |
| Weight per piece (including packing) | 616.2 g       |
| Weight per piece (excluding packing) | 561.01 g      |
| Customs tariff number                | 85371091      |
| Country of origin                    | CN            |

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

## Technical data

### Input data

#### DC operation

|                                              |                         |
|----------------------------------------------|-------------------------|
| Nominal input voltage range                  | 12 V DC ... 24 V DC     |
| Input voltage range                          | 8 V DC ... 30 V DC      |
| Typical national grid voltage                | 12 V DC                 |
|                                              | 24 V DC                 |
| Voltage type of supply voltage               | DC                      |
| Current consumption                          | 40 A                    |
| Static Boost ( $I_{\text{Stat.Boost}}$ )     | 45 A                    |
| Dynamic Boost ( $I_{\text{Dyn.Boost}}$ )     | 60 A (5 s)              |
| Selective Fuse Breaking ( $I_{\text{SFB}}$ ) | 215 A (15 ms)           |
| Reverse polarity protection                  | yes, < 60 V             |
| Nominal input current ( $I_N$ )              | 40 A (-40 °C ... 60 °C) |
| Input current $I_{\text{Static}}$            | 45 A (40 °C)            |
| Input current $I_{\text{Dynamic}}$           | 60 A (5 s)              |
| Input current $I_{\text{SFB}}$               | 215 A (15 ms)           |
| Transient surge protection                   | Varistor                |
| Voltage drop, input/output                   | 0.1 V                   |

### Output data

|                                              |                                           |
|----------------------------------------------|-------------------------------------------|
| Efficiency                                   | typ. 99.1 % (12 V DC)                     |
|                                              | typ. 99.3 % (24 V DC)                     |
| Nominal output voltage                       | $U_{\text{In}} - 0.1 \text{ V}$           |
| Nominal output current ( $I_N$ )             | 40 A                                      |
| Static Boost ( $I_{\text{Stat.Boost}}$ )     | 45 A                                      |
| Dynamic Boost ( $I_{\text{Dyn.Boost}}$ )     | 60 A (5 s)                                |
| Selective Fuse Breaking ( $I_{\text{SFB}}$ ) | 215 A (15 ms)                             |
| Derating                                     | 60 °C ... 70 °C (2.5 %/K)                 |
| Power loss nominal load max.                 | 6.5 W ( $I_{\text{OUT}} = 40 \text{ A}$ ) |
|                                              | 6 W ( $I_{\text{OUT}} = 40 \text{ A}$ )   |
| Connection in series                         | no                                        |

#### Signal: OK, 13/14

|                           |                                |
|---------------------------|--------------------------------|
| Output description        | Group contact                  |
| Maximum switching voltage | max. 30 V AC/DC                |
| Maximum inrush current    | ≤ 100 mA (short-circuit-proof) |

#### Signal relay 13/14

|                 |                                  |
|-----------------|----------------------------------|
| Default         | open                             |
| Additional text | $U_{\text{IN}} < 8 \text{ V DC}$ |

#### Signal relay 13/14

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

|                 |                           |
|-----------------|---------------------------|
| Default         | closed                    |
| Additional text | $U_{IN} > 8 \text{ V DC}$ |

## Signal relay 13/14

|                 |                             |
|-----------------|-----------------------------|
| Default         | open                        |
| Additional text | Redundancy module defective |

## Connection data

### Input

|                                                                                    |                     |
|------------------------------------------------------------------------------------|---------------------|
| Connection method                                                                  | Screw connection    |
| Conductor cross-section, rigid min.                                                | 0.5 mm <sup>2</sup> |
| Conductor cross-section, rigid max.                                                | 16 mm <sup>2</sup>  |
| Conductor cross-section flexible min.                                              | 0.5 mm <sup>2</sup> |
| Conductor cross-section flexible max.                                              | 16 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 16 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 16 mm <sup>2</sup>  |
| Conductor cross-section AWG min.                                                   | 20                  |
| Conductor cross-section AWG max.                                                   | 6                   |
| Stripping length                                                                   | 10 mm               |
| Screw thread                                                                       | M4                  |
| Tightening torque, min                                                             | 1.2 Nm              |
| Tightening torque max                                                              | 1.5 Nm              |

### Output

|                                                                                    |                     |
|------------------------------------------------------------------------------------|---------------------|
| Connection method                                                                  | Screw connection    |
| Conductor cross-section, rigid min.                                                | 0.5 mm <sup>2</sup> |
| Conductor cross-section, rigid max.                                                | 16 mm <sup>2</sup>  |
| Conductor cross-section flexible min.                                              | 0.5 mm <sup>2</sup> |
| Conductor cross-section flexible max.                                              | 16 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 16 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.5 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 16 mm <sup>2</sup>  |
| Conductor cross-section AWG min.                                                   | 20                  |
| Conductor cross-section AWG max.                                                   | 6                   |
| Stripping length                                                                   | 10 mm               |
| Screw thread                                                                       | M4                  |

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

|                        |        |
|------------------------|--------|
| Tightening torque, min | 1.2 Nm |
| Tightening torque max  | 1.5 Nm |

## Signal

|                                                                                    |                      |
|------------------------------------------------------------------------------------|----------------------|
| Connection method                                                                  | Push-in connection   |
| Conductor cross-section, rigid min.                                                | 0.2 mm <sup>2</sup>  |
| Conductor cross-section, rigid max.                                                | 1.5 mm <sup>2</sup>  |
| Conductor cross-section flexible min.                                              | 0.2 mm <sup>2</sup>  |
| Conductor cross-section flexible max.                                              | 1.5 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.2 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 0.75 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.2 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 1.5 mm <sup>2</sup>  |
| Conductor cross-section AWG min.                                                   | 24                   |
| Conductor cross-section AWG max.                                                   | 16                   |
| Stripping length                                                                   | 8 mm                 |

## Signaling

|                    |                                          |
|--------------------|------------------------------------------|
| Types of signaling | Relay contact, floating, current limited |
|--------------------|------------------------------------------|

## Signal output: OK, 13/14

|                           |                                                                                 |
|---------------------------|---------------------------------------------------------------------------------|
| $U_{in} < 8 \text{ V DC}$ | LED off, input voltage not present or short circuit at redundancy module output |
| $U_{in} > 8 \text{ V DC}$ | LED lights up green, input voltage present                                      |
| Redundancy modul faulty   | LED lights up red, redundancy module needs to be factory tested                 |

## Electrical properties

|                                            |          |
|--------------------------------------------|----------|
| Insulation voltage input, output / housing | 500 V DC |
|--------------------------------------------|----------|

## Product properties

|                            |                                                                     |
|----------------------------|---------------------------------------------------------------------|
| Product type               | Redundancy module                                                   |
| Product family             | QUINT S-ORING                                                       |
| MTBF (IEC 61709, SN 29500) | > 25297000 h (25 °C)<br>> 15153000 h (40 °C)<br>> 7449000 h (60 °C) |
| LED                        | yes                                                                 |

## Insulation characteristics

|                     |     |
|---------------------|-----|
| Protection class    | III |
| Degree of pollution | 2   |

## Life expectancy (electrolytic capacitors)

|             |       |
|-------------|-------|
| Current     | 40 A  |
| Temperature | 40 °C |

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752


<https://www.phoenixcontact.com/us/products/2907752>

|                 |          |
|-----------------|----------|
| Time            | 186000 h |
| Additional text | 12 V DC  |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 40 A     |
| Temperature     | 40 °C    |
| Time            | 123000 h |
| Additional text | 24 V DC  |

## Dimensions

|                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 32 mm                                                                               |
| Height              | 130 mm                                                                              |
| Depth               | 125 mm                                                                              |

## Installation dimensions

|                                  |               |
|----------------------------------|---------------|
| Installation distance right/left | 0 mm / 0 mm   |
| Installation distance top/bottom | 40 mm / 20 mm |

## Alternative assembly

|        |        |
|--------|--------|
| Width  | 122 mm |
| Height | 130 mm |
| Depth  | 35 mm  |

## Mounting

|                   |                                                                                                                                                                                                 |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting type     | DIN rail mounting                                                                                                                                                                               |
| Assembly note     | alignable: $P_N \geq 50\%$ , 5 mm horizontally, 15 mm next to active components, 50 mm vertically<br>alignable: $P_N < 50\%$ , 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |
| Mounting position | horizontal DIN rail NS 35, EN 60715                                                                                                                                                             |

## Material specifications

|                                                                    |                                               |
|--------------------------------------------------------------------|-----------------------------------------------|
| Flammability rating according to UL 94 (housing / terminal blocks) | V0                                            |
| Housing material                                                   | Metal                                         |
| Housing material                                                   | Aluminum / stainless steel                    |
| Type of housing                                                    | Aluminum (AlMg3)                              |
| Hood version                                                       | Galvanized sheet steel, free from chrome (VI) |

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

## Environmental and real-life conditions

### Ambient conditions

|                                                |                                                                                            |
|------------------------------------------------|--------------------------------------------------------------------------------------------|
| Degree of protection                           | IP20                                                                                       |
| Ambient temperature (operation)                | -40 °C ... 70 °C (> 60 °C Derating: 2,5 %/K)                                               |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                                                                           |
| Maximum altitude                               | ≤ 5000 m (> 2000 m, observe derating)                                                      |
| Climatic class                                 | 3K22 (in accordance with EN 60721-3-3)                                                     |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)                                                          |
| Shock                                          | 18 ms, 30g, in each space direction (according to IEC 60068-2-27)                          |
| Vibration (operation)                          | < 15 Hz, amplitude ±2.5 mm (according to IEC 60068-2-6)<br>15 Hz ... 150 Hz, 2.3g, 90 min. |
| Temp code                                      | T4 (-25 ... +70 °C; > 60 °C, Derating: 2,5 %/K)                                            |

## Standards and regulations

|                                     |             |
|-------------------------------------|-------------|
| Standard - Electrical safety        | IEC 62368-1 |
| Standard – Safety extra-low voltage | IEC 62368-1 |

## Approvals

|              |                                                                                                 |
|--------------|-------------------------------------------------------------------------------------------------|
| UL approvals | UL/C-UL listed UL 508                                                                           |
|              | UL/C-UL Recognized UL 60950-1                                                                   |
|              | UL 121201 & CSA C22.2 No. 213-17 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location) |

### Conformity/Approvals

|                                  |   |
|----------------------------------|---|
| SIL in accordance with IEC 61508 | 0 |
|----------------------------------|---|

## EMC data

|                                     |                                                   |
|-------------------------------------|---------------------------------------------------|
| Electromagnetic compatibility       | Conformance with EMC Directive 2014/30/EU         |
| Low Voltage Directive               | Conformance with Low Voltage Directive 2014/35/EC |
| EMC requirements for noise emission | EN 61000-6-3                                      |
|                                     | EN 61000-6-4                                      |
| EMC requirements for noise immunity | EN 61000-6-1                                      |
|                                     | EN 61000-6-2                                      |

### Conducted noise emission

|                       |                        |
|-----------------------|------------------------|
| Standards/regulations | EN 55016               |
|                       | EN 61000-6-3 (Class B) |

### Noise emission

|                       |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Standards/regulations | Additional basic standard EN 61000-6-5 (immunity in power station) |
|-----------------------|--------------------------------------------------------------------|

### Noise emission

|                       |                        |
|-----------------------|------------------------|
| Standards/regulations | EN 55016               |
|                       | EN 61000-6-3 (Class B) |

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

## DNV GL conducted noise emissions

|                 |                         |
|-----------------|-------------------------|
| DNV             | Class A                 |
| Additional text | Area power distribution |

## DNV GL noise radiation

|                 |                      |
|-----------------|----------------------|
| DNV             | Class B              |
| Additional text | Bridge and deck area |

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

## Electrostatic discharge

|                   |                      |
|-------------------|----------------------|
| Contact discharge | 8 kV (Test Level 4)  |
| Discharge in air  | 15 kV (Test Level 4) |
| Comments          | Criterion A          |

## Electromagnetic HF field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

## Electromagnetic HF field

|                     |                       |
|---------------------|-----------------------|
| Frequency range     | 80 MHz ... 1 GHz      |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range     | 1 GHz ... 6 GHz       |
| Test field strength | 10 V/m (Test Level 3) |
| Comments            | Criterion A           |

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

## Fast transients (burst)

|          |                                    |
|----------|------------------------------------|
| Input    | 2 kV (Test Level 3 - asymmetrical) |
| Output   | 2 kV (Test Level 3 - asymmetrical) |
| Signal   | 2 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion B                        |

## Surge voltage load (surge)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

## Surge voltage load (surge)

|          |                                    |
|----------|------------------------------------|
| Input    | 1 kV (Test Level 3 - symmetrical)  |
|          | 2 kV (Test Level 3 - asymmetrical) |
| Output   | 1 kV (Test Level 3 - symmetrical)  |
|          | 2 kV (Test Level 3 - asymmetrical) |
| Signal   | 1 kV (Test Level 2 - asymmetrical) |
| Comments | Criterion A                        |

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

## Conducted interference

|                     |                      |
|---------------------|----------------------|
| Input/output/signal | asymmetrical         |
| Frequency range     | 0.15 MHz ... 100 MHz |
| Comments            | Criterion A          |
| Voltage             | 20 V (Test Level 3)  |

## Criteria

|             |                                                                                      |
|-------------|--------------------------------------------------------------------------------------|
| Criterion A | Normal operating behavior within the specified limits.                               |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |


# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module

2907752

<https://www.phoenixcontact.com/us/products/2907752>

## Drawings

Dimensional drawing

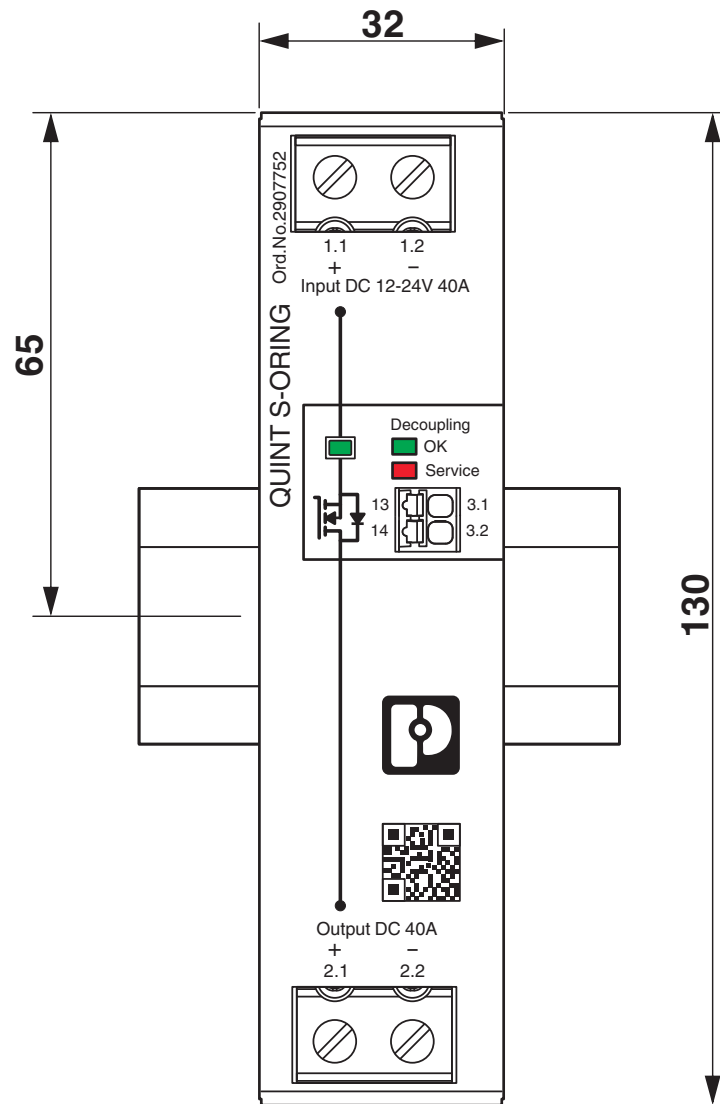


# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module


2907752

<https://www.phoenixcontact.com/us/products/2907752>

Dimensional drawing

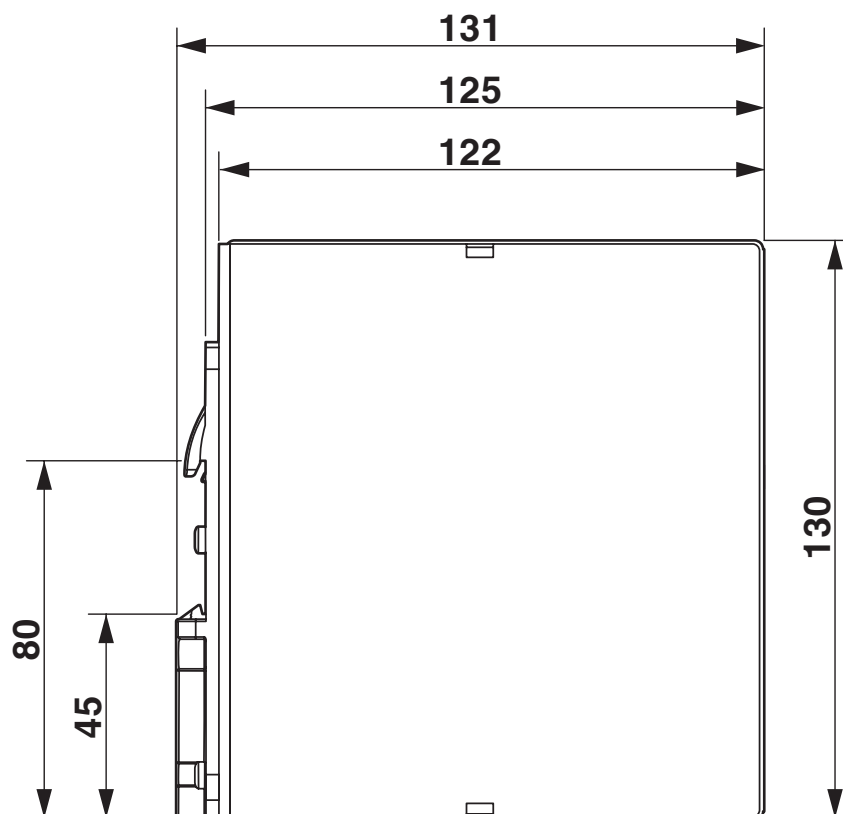

Diagram

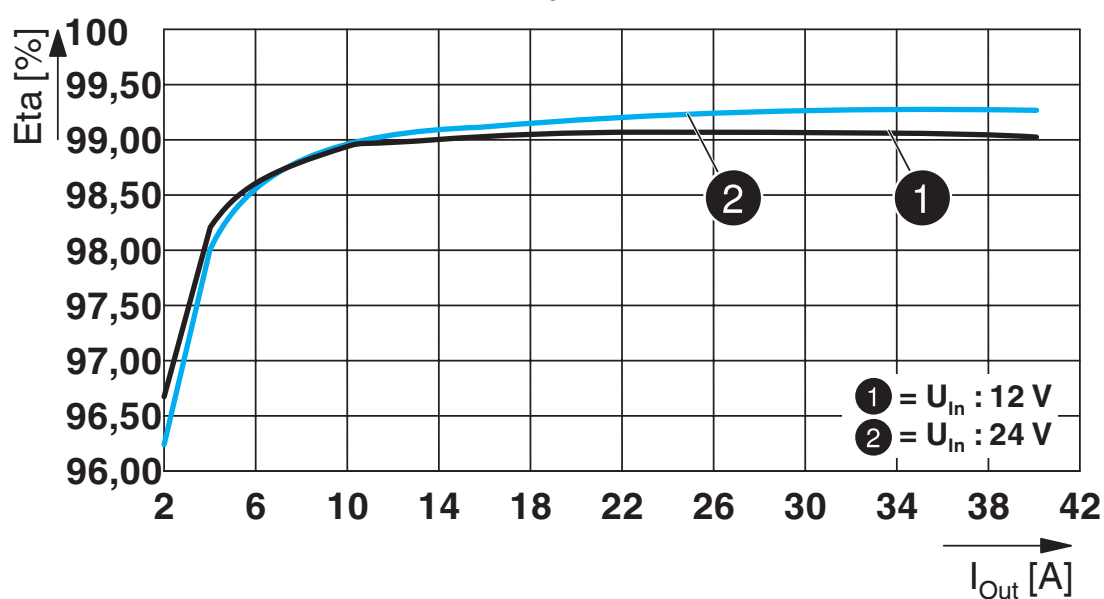


# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module


2907752

<https://www.phoenixcontact.com/us/products/2907752>

Diagram

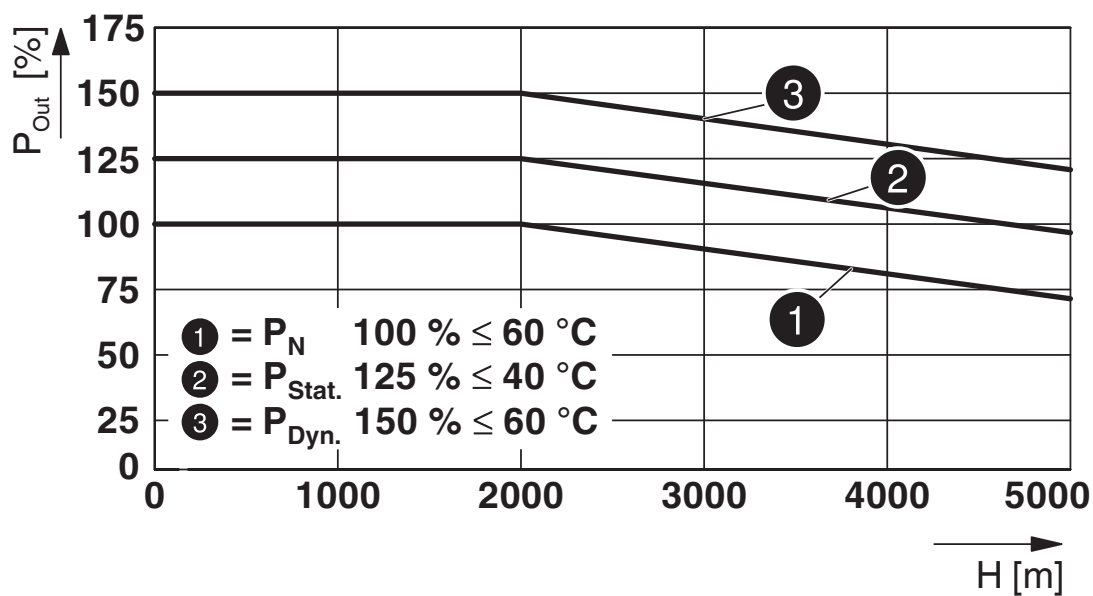

Block diagram

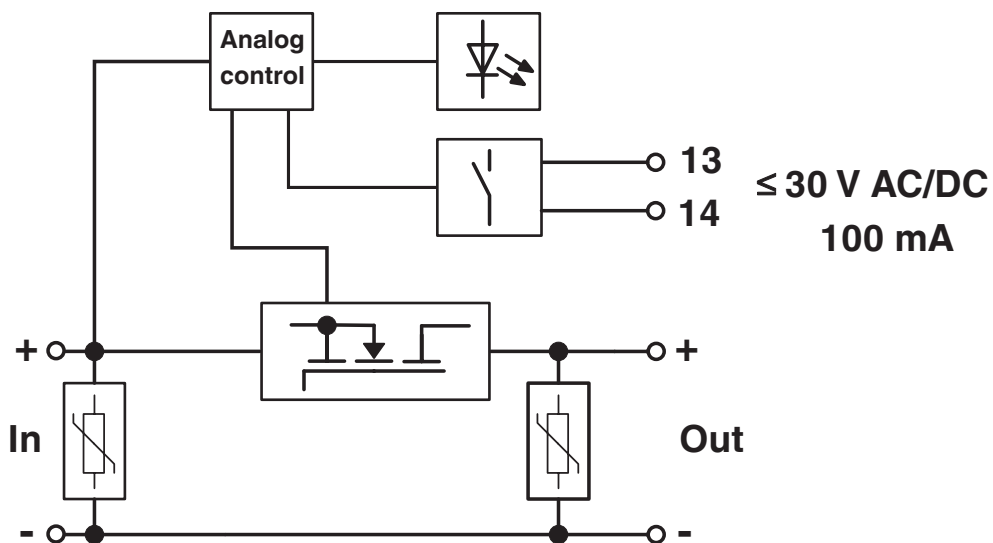

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752  
<https://www.phoenixcontact.com/us/products/2907752>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2907752>



**cUL Recognized**  
Approval ID: E211944



**UL Recognized**  
Approval ID: E211944



**EAC**  
Approval ID: RU S-DE.BL08.W.00764



**UL Listed**  
Approval ID: E123528



**cUL Listed**  
Approval ID: E123528

**DNV**  
Approval ID: TAA000011F



**IECEE CB Scheme**  
Approval ID: DE/PTZ/0048

|         |                                |                                |                   |                               |
|---------|--------------------------------|--------------------------------|-------------------|-------------------------------|
| ClassNK | NK                             |                                |                   |                               |
|         | Approval ID: TA25015M          |                                |                   |                               |
|         | Nominal voltage U <sub>N</sub> | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
| keine   |                                |                                |                   |                               |
|         | 500 V                          | 63 A                           | -                 | - 10                          |



**cUL Listed**  
Approval ID: E199827



**UL Listed**  
Approval ID: E199827

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27371010 |
| ECLASS-15.0 | 27371010 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000683 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 32151500 |
|-------------|----------|

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

## Environmental product compliance

### EU RoHS

|                                         |                    |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes                |
| Exemption                               | 6(c), 7(a), 7(c)-I |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-25                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | f95a055e-5565-4aa1-a507-6e9152c5cfef |

### EF3.0 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 13.17 kg CO2e |
|---------|---------------|

# QUINT4-S-ORING/12-24DC/1X40 - Redundancy module



2907752

<https://www.phoenixcontact.com/us/products/2907752>

## Accessories

### UWA 182/52 - Mounting adapter

2938235

<https://www.phoenixcontact.com/us/products/2938235>




Universal wall adapter for securely mounting the device in the event of strong vibrations. The device is screwed directly onto the mounting surface. The universal wall adapter is attached on the top/bottom.

---

### UTA 107/30 - Mounting adapter

2320089

<https://www.phoenixcontact.com/us/products/2320089>



Universal DIN rail adapter

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)