

2908662
<https://www.phoenixcontact.com/pc/products/2908662>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Output loop-powered temperature transducer for transmitting up to 2 sensor signals from RTD and TC sensors, as well as from resistance and voltage sensors via 4 mA ... 20 mA. HART, Signal conditioners with SIL functional safety, Standard configuration, Safety Integrity Level (SIL, IEC 61508): 2, Systematic Capability: 3, Screw connection

Commercial data

Item number	2908662
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DK1143
GTIN	4055626355450
Weight per piece (including packing)	201.7 g
Weight per piece (excluding packing)	171.8 g
Customs tariff number	85437090
Country of origin	DE

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

Technical data

Product properties

Product type	Temperature transmitter
Product family	MACX Analog
No. of channels	2
Configuration	Software
	HART

Insulation characteristics

Overvoltage category	II
Pollution degree	2

System properties

Functionality

Configuration	Software
	HART

Electrical properties

Electrical isolation between input and output	yes
Step response (0–99%)	0.8 s (TC)

Electrical isolation Input/output

Test voltage	2 kV AC (50 Hz, 60 s)
--------------	-----------------------

Supply

Supply voltage range	loop-powered, no external supply necessary
	12 V DC ... 42 V DC (Standard)
	12 V DC ... 32 V DC (SIL active)

Input data

Signal

Input signal	Temperature
--------------	-------------

Measurement

Number of inputs	2
Input voltage range	-20 mV ... 100 mV (Minimum measuring span: 5 mV)
Sensor types (RTD) that can be used	Pt, Ni, Cu sensors: 2, 3, 4-wire
Sensor types that can be used (TC)	A, B, C, D, E, J, K, L, N, R, S, T, U
Temperature measuring range	-250 °C ... 2500 °C (Range depending on the sensor type)
	-200 °C ... 850 °C (Pt 100)
Temperature measuring range	> 10 K (RTD)
	> 50 K (TC)
Linear resistance measuring range	10 Ω ... 2000 Ω (Minimum measuring span: 10 Ω)

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

Output data

Signal: Current

Configurable/programmable	no
Current output signal	4 mA ... 20 mA
	20 mA ... 4 mA
Max. current output signal	23 mA
Load	(U _L - 11 V) / 0,023 A
HART coding	FSK ± 0.5 mA
HART version	7
Transmission speed	1200 Baud
Mains frequency filter	50/60 Hz
Communication resistance	≥ 250 Ω
Switch-on delay	≈  s (HART)
	≈  s (Measured value)

Connection data

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm² ... 2.5 mm²
Conductor cross-section flexible	0.2 mm² ... 2.5 mm²
Conductor cross-section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm

Test socket

Max. diameter	2 mm
---------------	------

Ex data

Ex installation (EPL)	Gc
	Div. 2

Interfaces

Data communication (bypass)

Protocols supported	HART
---------------------	------

Signaling

Status display	LED (red)
----------------	-----------

Dimensions


MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

Dimensional drawing



Width	12.5 mm
Height	112.5 mm
Depth	113.7 mm
Depth NS 35/7,5	114.5 mm (Snapped onto DIN rail NS 35/7,5 in accordance with EN 60715)

Material specifications

Color	gray (RAL 7042)
-------	-----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C -40 °C ... 70 °C (SIL active)
Ambient temperature (storage/transport)	-40 °C ... 100 °C
Altitude	≤ 4000 m (Above sea level)
Climatic class	B2
Permissible humidity (operation)	5 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	II 3G Ex nA IIC T6...T4 Gc
----------------	----------------------------

UL, USA/Canada

Identification	UL 61010 Recognized
----------------	---------------------

FM

Identification	NI, Class I, Div. 2, Groups A, B, C, D
----------------	--

CSA

Identification	NI / Class I / Div. 2 / ABCD T6/T5/T4
----------------	---------------------------------------

Shipbuilding approval

Certificate	DNV GL TAA00002GX
-------------	-------------------

Safety Integrity Level (SIL, IEC 61508)

Identification	2
----------------	---

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662
<https://www.phoenixcontact.com/pc/products/2908662>

Systematic Capability	
Identification	3

Shipbuilding data	
Temperature	D
Humidity	B
Vibration	A
EMC	B
Enclosure	A

Mounting

Mounting type	DIN rail mounting
---------------	-------------------


MACX MCR-TS-I-OLP - Temperature measuring transducer

2908662

<https://www.phoenixcontact.com/pc/products/2908662>

Drawings


Dimensional drawing

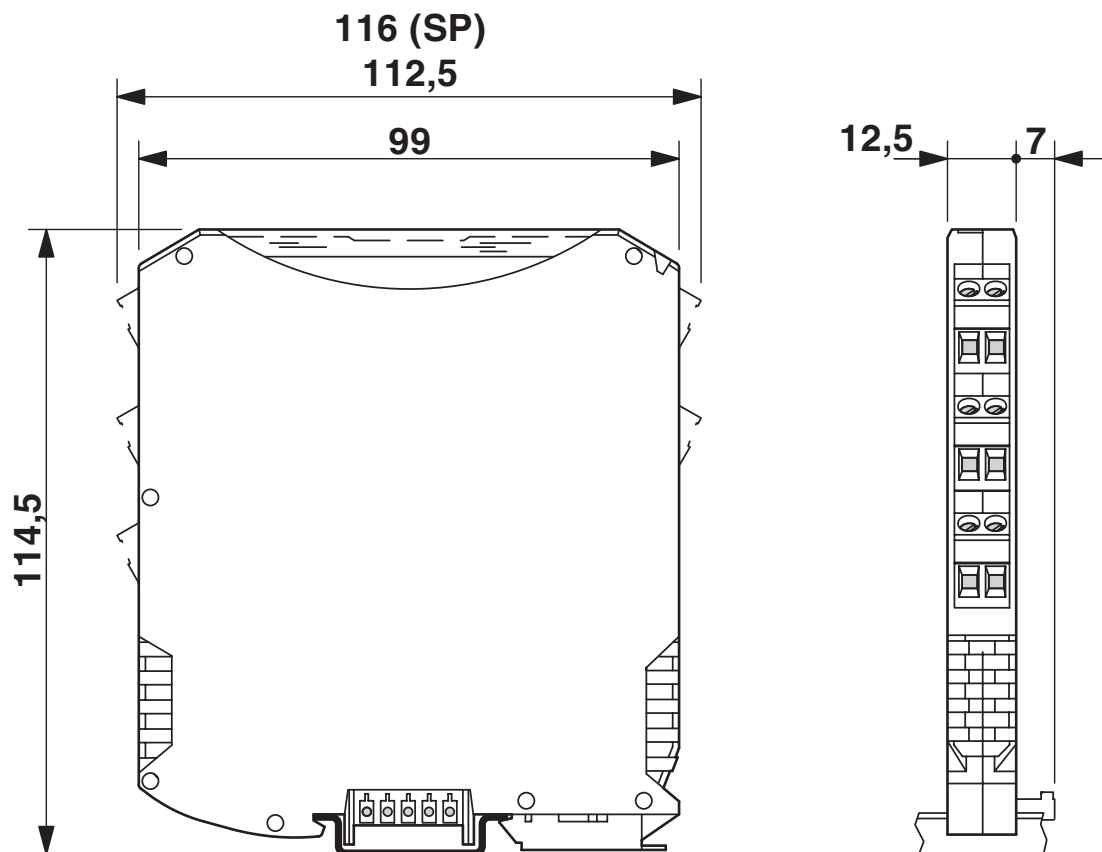

MACX MCR-TS-I-OLP - Temperature measuring transducer

2908662

<https://www.phoenixcontact.com/pc/products/2908662>

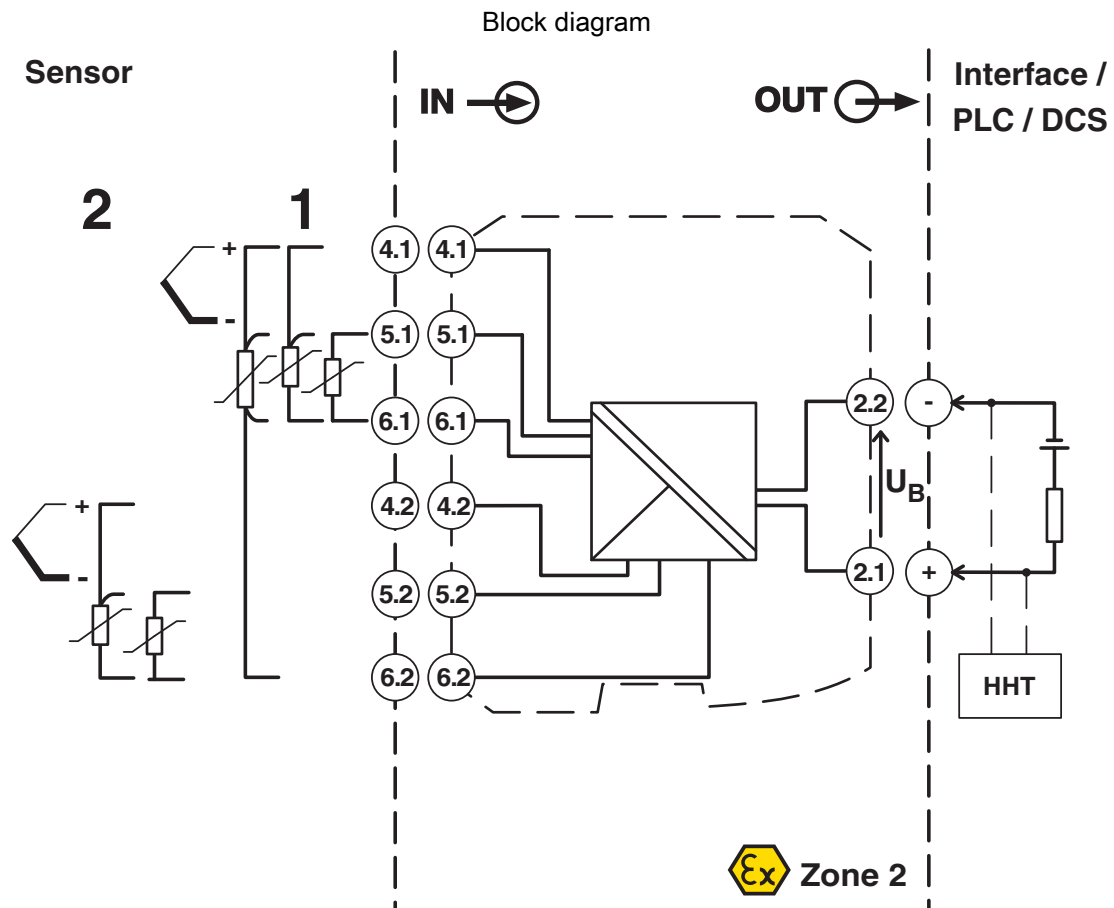

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2908662>



cUL Recognized
Approval ID: FILE E 198586



UL Recognized
Approval ID: FILE E 198586



EAC
Approval ID: RU*DE.*08.B.01608/19



DNV GL
Approval ID: TAA00002GX



Functional Safety
Approval ID: Z10 029429 0021



DNV
Approval ID: TAA00002GX



CSA
Approval ID: 70107976



FM approved
Approval ID: FM17US0110X

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662
<https://www.phoenixcontact.com/pc/products/2908662>

Classifications

ECLASS

ECLASS-13.0	27210129
ECLASS-15.0	27210129

ETIM

ETIM 9.0	EC002919
----------	----------

UNSPSC

UNSPSC 21.0	41112100
-------------	----------

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662
<https://www.phoenixcontact.com/pc/products/2908662>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: n/a)
SCIP	4382a4b0-b4e8-44e4-a92a-f8398f3d6173

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

Accessories

MCR-PAC-T-USB - Programming adapter

2309000

<https://www.phoenixcontact.com/pc/products/2309000>

Programming adapter with USB and T port interface, 2.4 m for programming FA MCR-..., MCR-...-LP-..., and MCR-...-HT-... modules



GW HART USB MODEM - Cable adapter

1003824

<https://www.phoenixcontact.com/pc/products/1003824>

USB HART modem cable for communication between a PC and HART devices, cable length: 1 m.



MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

EA-MSTB 2,5/ 5 - Accessories

1831016

<https://www.phoenixcontact.com/pc/products/1831016>

Cover for screw shafts of the MSTB connector ranges with a pitch of 5.0 mm and 5.08 mm. These can be aligned and shortened for use with different numbers of positions.



MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/pc/products/0201663>

Insulating sleeve, color: white



MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/pc/products/0201676>

Insulating sleeve, color: red




MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/pc/products/0201689>

Insulating sleeve, color: blue



MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/pc/products/0201692>

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/pc/products/0201702>

Insulating sleeve, color: green



MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/pc/products/0201728>

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/pc/products/0201731>

Insulating sleeve, color: black



MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/pc/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross-section, number of positions: 1, color: gray

UC-EMLP (11X9) - Plastic label

0819291

<https://www.phoenixcontact.com/pc/products/0819291>



Plastic label, Sheet, white, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 9 mm, text field width: 11 mm

MACX MCR-TS-I-OLP - Temperature measuring transducer




2908662

<https://www.phoenixcontact.com/pc/products/2908662>

UC-EMLP (11X9) YE - Plastic label

0822602

<https://www.phoenixcontact.com/pc/products/0822602>



Plastic label, Sheet, yellow, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 9 mm, text field width: 11 mm

UC-EMLP (11X9) CUS - Plastic label

0824547

<https://www.phoenixcontact.com/pc/products/0824547>



Plastic label, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: adhesive, text field height: 9 mm, text field width: 11 mm

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662


<https://www.phoenixcontact.com/pc/products/2908662>

UC-EMLP (11X9) YE CUS - Plastic label

0824548

<https://www.phoenixcontact.com/pc/products/0824548>

Plastic label, can be ordered: by sheet, yellow, labeled according to customer specifications, mounting type: adhesive, text field height: 9 mm, text field width: 11 mm



UC-EMLP (11X9) SR - Plastic label

0828094

<https://www.phoenixcontact.com/pc/products/0828094>

Plastic label, Sheet, silver, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, Number of individual labels: 10, text field height: 9 mm, text field width: 11 mm



MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

UC-EMLP (11X9) SR CUS - Plastic label

0828098

<https://www.phoenixcontact.com/pc/products/0828098>



Plastic label, can be ordered: by sheet, silver, labeled according to customer specifications, mounting type: adhesive, Number of individual labels: 10, text field height: 9 mm, text field width: 11 mm

US-EMLP (11X9) - Plastic label

0828789

<https://www.phoenixcontact.com/pc/products/0828789>



Plastic label, Card, white, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 135, text field height: 9 mm, text field width: 11 mm

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

US-EMLP (11X9) YE - Plastic label

0828871

<https://www.phoenixcontact.com/pc/products/0828871>



Plastic label, Card, yellow, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 135, text field height: 9 mm, text field width: 11 mm

US-EMLP (11X9) SR - Plastic label

0828872

<https://www.phoenixcontact.com/pc/products/0828872>



Plastic label, Card, silver, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, mounting type: adhesive, Number of individual labels: 135, text field height: 9 mm, text field width: 11 mm

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

LS-EMLP (11X9) WH - Device marker

0831678

<https://www.phoenixcontact.com/pc/products/0831678>

Device marker, Sheet, white, unmarked, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: adhesive, Number of individual labels: 255, text field height: 9 mm, text field width: 11 mm




LS-EMLP (11X9) SR - Device marker

0831705

<https://www.phoenixcontact.com/pc/products/0831705>

Device marker, Sheet, silver, unmarked, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: adhesive, Number of individual labels: 255, text field height: 9 mm, text field width: 11 mm



MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

LS-EMLP (11X9) YE - Device marker

0831732

<https://www.phoenixcontact.com/pc/products/0831732>

Device marker, Sheet, yellow, unmarked, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: adhesive, Number of individual labels: 255, text field height: 9 mm, text field width: 11 mm



MACX MCR-PTB - Power and error message module

2865625

<https://www.phoenixcontact.com/pc/products/2865625>



Power and fault signaling module with screw connection, including corresponding ME 17,5 TBUS 1,5/ 5-ST-3,81 GY DIN rail connector

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

MACX MCR-PTB-SP - Power and error message module

2924184

<https://www.phoenixcontact.com/pc/products/2924184>



Power and fault signaling module with Push-in connection, including corresponding ME 17,5 TBUS 1,5/ 5-ST-3,81 GY DIN rail connector

QUINT4-SYS-PS/1AC/24DC/2.5/SC - Power supply

2904614

<https://www.phoenixcontact.com/pc/products/2904614>



Primary-switched power supply, QUINT POWER, screw connection, DIN rail mounting, supply of devices possible via the TBUS DIN rail connector, protective coating, input: single-phase, output: 24 V DC/2.5 A

MACX MCR-TS-I-OLP - Temperature measuring transducer



2908662

<https://www.phoenixcontact.com/pc/products/2908662>

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/pc/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com