




ø23 2.0/50mm C		
FOCAL LENGTH		f=50mm
MAX. DIAMETER (RATIO)		F=1:2.0~22
ELEMENT		6 GROUPS 7 ELEMENTS
PICTURE SIZE		13.8×18.4mm
ANGLE	VER. ANGLE	15.7°
	HOR. ANGLE	20.6°
	DIA. ANGLE	25.4°
DISTORTION (TV)		0.8%
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	75mm
	HOR.	100mm
	DIA.	124mm
MINIMUM FOCUS DISTANCE		0.3m
FLANGE BACK		17.526mm in air
BACK FOCUS		21.6mm in air
FILTER SCREW SIZE		M37.5×0.5
FRONT/REAR EFFECTIVE DIA.		FRONT ø31.8mm REAR ø16.0mm
MOUNT		C-MOUNT
EXIT PUPIL		-19.1mm
TEMPERATURE RANGE		-10~+50°C
STORAGE TEMPERATURE RANGE		-20~+60°C
RESOLUTION CENTER/CORNER		CENTER 160本/mm CORNER 80本/mm
LENS COATING		WIDE BAND MULTI COATING
WEIGHT		220 g

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

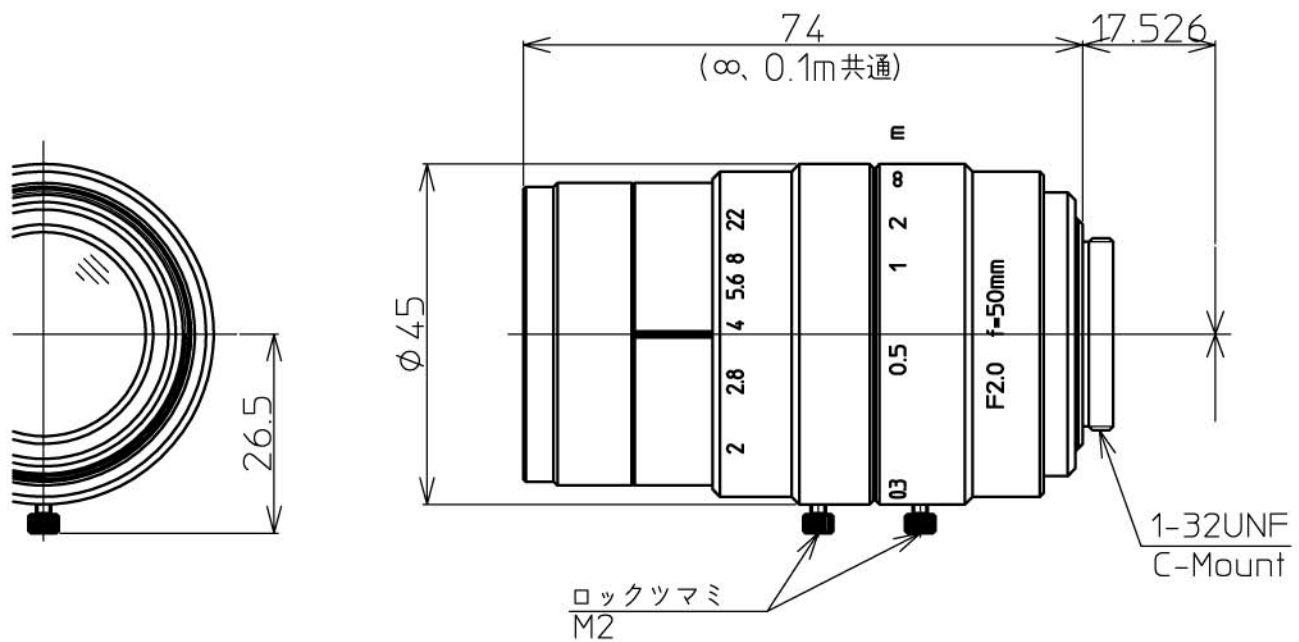

		尺 度	1/1	承 認	八木	製 図	富永
		機 種 名	ø23 F2.0 f=50mm				
		機 種 番	LM50XC				
2010.06.01	作成年月日						