

**In development**  
The model is not yet in series production, but will be introduced shortly.



### Specification

**- PRELIMINARY -**

#### Streaming


Streams	2x RTSP 1x HTTP
Resolution	1920x1080 @ 30 fps 1440x1080 @ 30 fps 1280x720 @ 30 fps 640x480 @ 30 fps
Compression	MJPEG H.264

#### Event Recorder

Recordings	
Recording duration (maximum)	120 s
Pre-event time (maximum)	60 s
Post-event time (maximum)	60 s
Event trigger	Hardware Input WebCockpit REST-API

### Sensor

Sensor type	CMOS Color
Shutter	Global Shutter
Sensor characteristic	Linear
Readout mode	Progressive scan
Pixel Class	3 MP
Resolution	3.15 Mpix
Resolution (h x v)	2048 x 1536 Pixel
Aspect ratio	4:3
ADC	12 bit
Color depth (camera)	8 bit
Optical sensor class	1/3"
Optical Size	4.608 mm x 3.456 mm
Optical sensor diagonal	5.76 mm 1/3.1"
Pixel size	2.25 µm
Manufacturer	Sony
Sensor Model	IMX900-AQR-C

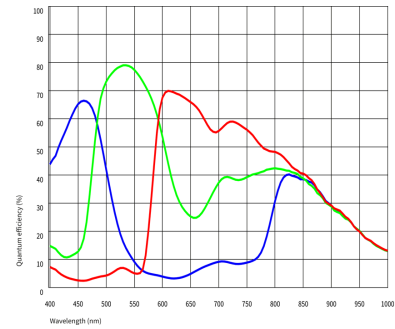

### Model

Exposure time (minimum - maximum)	0.031 ms - 33.333 ms
Power consumption	2.1 W - 3 W

### Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


Allowed device temperature during operation	0 °C - 55 °C / 32 °F - 131 °F
Allowed device temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	20 % - 80 %

### Connectors

Interface connector	GigE RJ45, screwable
I/O connector	8-pin Hirose connector (HR25-7TR-8PA(73))
Power supply	12 V - 24 V

### Pin assignment I/O connector

1	Ground (GND)
2	Output with optocoupler (-)
3	General Purpose I/O (GPIO) 1
4	Input with optocoupler (-)
5	Output with optocoupler (+)
6	General Purpose I/O (GPIO) 2
7	Input with optocoupler (+)
8	Input power supply (VCC) 12-24 V DC



### Design

Lens Mount	C-Mount
IP code	IP30
Dimensions H/W/L	29.0 mm x 29.0 mm x 29.0 mm
Mass	47 g
Housing material	Magnesium / stainless steel

## Features

List of on-camera image pre-processing features.

All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

### Image Adjustments

Auto exposure	✓
Auto gain	✓
Auto whitebalance	✓
Color correction	-
Gamma	-
LUT	-
Mirror/flip	X/Y

### Others

Firmware update	✓
1st supported firmware version	1.3.0