



In series


The model is in series and available for the long term.



Specification

Sensor

Sensor type	CMOS Color
Shutter	Rolling shutter
Sensor characteristic	Linear
Readout mode	-
Pixel Class	5 MP
Resolution	5.11 Mpix
Resolution (h x v)	2608 x 1960 Pixel
Aspect ratio	4:3
ADC	12 bit
Color depth (camera)	12 bit
Optical sensor class	1/2.8"
Optical Size	5.216 mm x 3.920 mm
Optical sensor diagonal	6.52 mm (1/2.45")
Pixel size	2 µm
Manufacturer	Sony
Sensor Model	IMX675-AAQR1-C
Gain (master/RGB)	31.6x/16x
AOI horizontal	same frame rate
AOI vertical	increased frame rate
AOI image width / step width	256 / 2
AOI image height / step width	2 / 2
AOI position grid (horizontal/vertical)	2 / 2
Binning horizontal	increased frame rate
Binning vertical	increased frame rate
Binning method	
Binning factor	-
Subsampling horizontal	
Subsampling vertical	
Subsampling method	M/C automatic
Subsampling factor	-

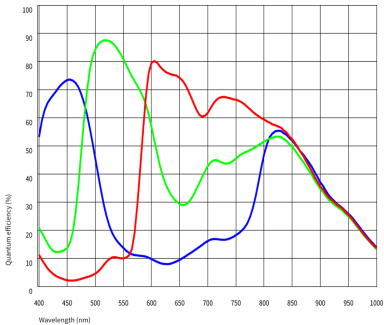

Model

Frame rate freerun mode	24 fps
Frame rate trigger (continuous)	24 fps
Frame rate trigger (maximum)	27 fps
Exposure time (minimum - maximum)	0.017 ms - 1999 ms
Long exposure (maximum)	119978 ms
Power consumption	2.4 W - 3.5 W

Ambient conditions

For PCB versions, refer to the separate hints in the respective documentation.


Allowed device temperature during operation	0 °C - 85 °C / 32 °F - 185 °F
Allowed ambient temperature during operation	0 °C - 40 °C / 32 °F - 104 °F
Allowed ambient temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	20 % - 80 %

Connectors

Interface connector	ZIF
I/O connector	10-pin Wuerth connector (WR-WTB 1.00 mm)
Power supply	12 V - 24 V

Pin assignment I/O connector

1	Power supply (VCC) 12-24 V
2	Power supply, ground
3	General Purpose I/O (GPIO) 2, 3.3 V - Line 3
4	General Purpose I/O (GPIO) 1, 3.3 V - Line 2
5	I2C SCL (signal clock) 3.3 V
6	I2C SDA (signal data) 3.3 V
7	Trigger input without optocoupler 3.3 V - Line 0
8	Flash output without optocoupler 3.3 V - Line 1
9	Ground (GND)
10	Voltage output 3.3 V, max. 100 mA



Design

Lens Mount	
IP code	-
Dimensions H/W/L	45.0 mm x 45.0 mm x 10.0 mm
Mass	12 g
Housing material	-

Features

List of on-camera image pre-processing features.

All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

Image Acquisition	Freerun	✓
	Software trigger	✓
	Hardware trigger	✓
	Trigger controlled exposure	-
	Denoiser	✓
	Long exposure	✓
	Line scan	-
	Global start	-

Subject to technical modifications (2025-08-01)

Flashing

Flashing	-
PWM flashing	-

Image Adjustments

Auto exposure	-
Auto gain	-
Auto whitebalance	-
Color correction	-
Gamma	-
LUT	-
Mirror/flip	X/Y

On-board Image Processing

Pixel formats	BayerRG8 BayerRG10p BayerRG12 BayerRG12p BayerRG10
Region of interest	✓
Decimation (FPGA)	✓
Decimation (Sensor)	-
Binning (FPGA)	-
Binning (Sensor)	2x2 Increases frame rate.

Others

IP settings	✓
Bandwidth management	✓
Chunks	-
Sequencer	-
PTP	✓
Firmware update	✓
1st supported firmware version	3.60