

In series

The model is in series and available for the long term.



Specification

Streaming


Streams	2x RTSP 1x HTTP
Resolution	1920x1080 @ 30 fps 1440x1080 @ 30 fps 1280x720 @ 30 fps 640x480 @ 30 fps
Compression	MJPEG H.264

Event Recorder

Recordings	
Recording duration (maximum)	120 s
Pre-event time (maximum)	60 s
Post-event time (maximum)	60 s
Event trigger	Hardware Input WebCockpit REST-API

Sensor

Sensor type	CMOS Color
Shutter	Rolling shutter
Sensor characteristic	Linear
Readout mode	-
Pixel Class	8 MP
Resolution	8.39 Mpix
Resolution (h x v)	3856 x 2176 Pixel
Aspect ratio	16:9
ADC	12 bit
Color depth (camera)	8 bit
Optical sensor class	1/1.8"
Optical Size	7.712 mm x 4.352 mm
Optical sensor diagonal	8.86 mm (1/1.81")
Pixel size	2 µm
Manufacturer	Sony
Sensor Model	IMX678-AAQR1-C

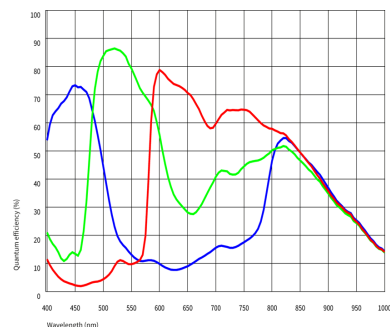

Model

Exposure time (minimum - maximum)	0.031 ms - 33.333 ms
Power consumption	3.3 W - 4.1 W

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


Allowed device temperature during operation	0 °C - 55 °C / 32 °F - 131 °F
Allowed device temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	20 % - 80 %

Connectors

Interface connector	GigE RJ45, screwable
I/O connector	8-pin Hirose connector (HR25-7TR-8PA(73))
Power supply	12 V - 24 V

Pin assignment I/O connector

1	Ground (GND)
2	Output with optocoupler (-)
3	General Purpose I/O (GPIO) 1
4	Input with optocoupler (-)
5	Output with optocoupler (+)
6	General Purpose I/O (GPIO) 2
7	Input with optocoupler (+)
8	Input power supply (VCC) 12-24 V DC



Design

Lens Mount	C-Mount
IP code	IP30
Dimensions H/W/L	29.0 mm x 29.0 mm x 29.0 mm
Mass	47 g
Housing material	Magnesium / stainless steel

Features

List of on-camera image pre-processing features.

All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

Image Adjustments

Auto exposure	✓
Auto gain	✓
Auto whitebalance	✓
Color correction	-
Gamma	-
LUT	-
Mirror/flip	X/Y

Others

Firmware update	✓
1st supported firmware version	1.0.0